

Analysis of Exposure To Radon in Bulgarian Rehabilitation Hospitals

Kremena Georgieva Ivanova (✉ k.ivanova@ncrrp.org)

National Center of Radiobiology and Radiation Protection: Nacionalen cent'r po radiobiologia i radiacionna zasita <https://orcid.org/0000-0003-0731-4259>

Desislava Djuvnakova

National Center of Radiobiology and Radiation Protection: Nacionalen cent'r po radiobiologia i radiacionna zasita

Zdenka Stojanovska

Goce Delchev University Shtip: Goce Delcev University

Jana Djounova

National Center of Radiobiology and Radiation Protection: Nacionalen cent'r po radiobiologia i radiacionna zasita

Bistra Kunovska

National Center of Radiobiology and Radiation Protection: Nacionalen cent'r po radiobiologia i radiacionna zasita

Nina Chobanova

National Center of Radiobiology and Radiation Protection: Nacionalen cent'r po radiobiologia i radiacionna zasita

Research Article

Keywords: mineral water, radon, rehabilitation hospital, track detector, radiation dose

Posted Date: June 18th, 2021

DOI: <https://doi.org/10.21203/rs.3.rs-550240/v1>

License:  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Analysis of exposure to radon in Bulgarian rehabilitation hospitals

Kremena Ivanova^{1a}, Desislava Djuvnačková¹, Zdenka Stojanovska², Jana Djounova¹, Bistra Kunovska¹, Nina Chobanova¹

¹National Centre of Radiobiology and Radiation Protection, 3 Sv. Georgi Sofijski st., 1606 Sofia, Bulgaria

²Faculty of Medical Sciences, Goce Delcev University of Stip, 10-A Krste Misirkov st., 2000 Stip, Republic of North Macedonia

*Corresponding author: Tel.: +359878124368; fax: +35928621059

E-mail address: k.ivanova@ncrrp.org and kivanova1968@gmail.com (K. Ivanova)

Abstract: Mineral springs are used in spa resorts throughout the world. Radon is a natural radioactive source, which can dissolve, accumulate, and be transported by water. This study investigates the radon concentration in air and water in 12 Bulgarian rehabilitation hospitals and presents the assessment of the exposure to radon in them. The measurements were performed at 401 premises within 21 buildings, using two types of passive detectors for a dry and wet environment that were exposed from February, 2019 to June, 2019. The radon concentration varied from 19 to 2550 Bq/m³ with an arithmetic mean and a standard deviation of 102 Bq/m³ and 191 Bq/m³, respectively. The hypothesis that in hospitals the source of radon, besides soil under the buildings, is also the mineral water that is used for treatment, was tested. Thermal water samples were procured sequentially from a spring and baths to analyse the reduction of radon concentration in them till reaching the premises. The results show that the concentration of radon decreased by approximately 50%. Further, the correlation analysis applied to the data proved the relation of the levels of indoor radon in the treatment rooms with those in the water. Mineral water used in rehabilitation hospitals have radon transfer coefficients ranging from $4.5 \cdot 10^{-4}$ to $8.4 \cdot 10^{-3}$. In addition, an analysis of the exposure of patients and workers to radon in rehabilitation hospitals based on the indoor radon levels and period of exposure was performed.

Key words: mineral water; radon; rehabilitation hospital; track detector; radiation dose

Acknowledgements This work is supported by the Bulgarian National Science Fund of the Ministry of Education and Science (Project KII-06-H23-1/2018 r). The authors express their gratitude to the Management of Specialized Rehabilitation Hospitals for the support of the survey.

1. Introduction Radon (²²²Rn) is a natural radioactive gas formed from the radioactive decay of ²²⁶Ra to short-lived radioactive products. Radon and its decay products are recognized as the most significant natural source of human exposure (UNSCEAR, 2006), and its inhalation can cause lung cancer (WHO, 2009). To identify the radon sources, and explain the factors that affect radon dynamics in an indoor environment, numerous measurements of radon have been performed in various homes and workplaces around the world. It is well known that in most of the cases, the main source of indoor radon is the radon that is generated in the underlying rock and soil of the buildings, which is transported indoors because of concentrations and pressure difference flows. In addition, the radon gas can dissolve and accumulate in water from underground sources, such as wells or mineral springs, where the water, which comes from deep springs, can contain high radon concentration because of leaching of rocks, making it an additional source of indoor radon. Further, rehabilitation centres use mineral water for therapy, which can have higher levels of radon. Furthermore, concentrations of radon (²²²Rn) in thermal waters can vary from 10 Bq/l to above 1000 Bq/l (Szerbin, 1996; Vogianis et al., 2004; Manic et al., 2006; Nikolopoulos et al., 2010). The balneotherapy process using thermal water contributes to radon release into the indoor air and because of large volume of water used, the concentrations could reach a high value. Considering the health effects of radon, the professional staff could be exposed to a significant amount of radon. In literature, the annual effective doses reported for such workers have varied from several units to tens mSv per year (Radolić et al., 2005; Zunic et al., 2006).

52 The Council of the European Union issued the European Basic Safety Standards (EU BSS) in December.
 53 2013, which recommended that the annual average radon concentration should not be higher than 300
 54 Bq/m³ in dwellings, workplaces and building with public access (EC, 2013).
 55 Bulgaria has an abundance of mineral water springs located throughout its territory (Hristov et. al, 2016).
 56 According to Vassileva, (1996), the number of mineral springs in Bulgaria is over 520, with different
 57 compositions, temperatures, and properties of mineral water with most of them being warm. 57 of the
 58 230 existing spas are promoted as balneological resorts (Hristov at. al., 2019). There have been certain
 59 investigations of natural radioactivity and radon in mineral water in the literature, which shows the
 60 presence of a high concentration (Kamenova-Totzeva et. al., 2018). This implies that in spa or in
 61 rehabilitation centres, staff and patients may have been exposed to higher levels of radon, leading to
 62 significant additional exposure. Although Bulgaria has adapted its radiation protection standards based
 63 on the European directive, there exists no systematic indoor radon measurements in public buildings
 64 where mineral water is used.
 65 This paper focused on the results of indoor radon (C_{Rn}) and radon in water (C_{Rnw}) measurements obtained
 66 via a survey of 12 thermal specialized hospitals for rehabilitation in Bulgaria. The aim of the survey,
 67 realized in the framework of a project funded by Bulgarian National Science Fund, was to investigate
 68 radon levels and perform a radon exposure assessment in buildings with public access. Thus, the national
 69 measurement protocol for indoor radon in buildings with public access, where the thermal water is used,
 70 was verified.

71 2. Materials and method

72 2.1. Objects and design of survey

73 Bulgaria is situated in the north-eastern part of the Balkan Peninsula. Several thermal and mineral water
 74 springs exist within the Bulgarian territory with great variation in the physical properties and chemical
 75 composition because of the diverse geological structure of the country. The use of thermal water for
 76 treatment in Bulgaria has been known since ancient times. Specialized rehabilitation hospitals were
 77 established in the 1960s and in the past, there were more hospitals. Currently, there are 13 branches left,
 78 where the treatment takes place. The surveyed branches are described in Table 1, where the codes,
 79 administrative location (settlement, municipality, and district) and number of measured premises are
 80 presented. Measurements were not performed at the Pomorie branch located on the Black Sea coast, as
 81 it uses healing sea mud instead of mineral water.

82 All the branches (11) of the national complex are located in mountainous regions, except for one present
 83 in the Danube plain (the village of Ovcha Mogila). The locations within the territory of Bulgaria are
 84 presented in Figure 1. The specialized hospitals are located primarily in small spa resorts, with only
 85 Kyustendil being a relatively large town and the administrative centre of the district. Five of these
 86 specialized hospitals are situated within one building, while the rest are in two or three buildings. The
 87 bathrooms with pools in the branch at Banya-Karlovo are situated in two separate small buildings on
 88 one floor. Further, an additional building of the Ministry of Health was investigated in Velingrad, which
 89 was also used for rehabilitation purposes. The exact number of buildings are presented in Table 1. The
 90 buildings are usually large having several floors (from 2 in Pavel Banya and Varshets to 9 in Narechen)
 91 and the total area of these buildings varies from 360 to 8500 m². The underground floors in the hospitals
 92 are usually occupied with, a swimming pool or treatment rooms situated in them, but in some of
 93 hospitals, the underground floor is used for storage of mineral water in tanks or for warehouses and
 94 workshops.

95
 96 *Table 1. Location of surveyed specialized rehabilitation hospitals with their code, number of*
 97 *buildings, measured premises with and without using water for the treatment. Percentage of losses of*
 98 *detectors*

Code	Location (village, municipality, district)	No. of buildings	No. of premises	No. of premises for water treatments	% of detectors losses
H1	Narechenski Bani, Asenovgrad, Plovdiv	1	19	10	9

H2	Momin Prohod, Kosteneec, Sofia-district	2	27	22	14
H3	Banya, Karlovo, Plovdiv	3	12	9	40
H4	Hissarya, Hissarya, Plovdiv	1	23	7	14
H5	Pavel Banya, Stara Zagora	2	31	15	12
H6	Varshets, Montana	2	33	15	11
H7	Bankya, Sofia, Sofia-city	1	18	2	0
H8	Kyustendil, Kyustendil	2	21	5	19
H9	Sandanski, Blagoevgrad	1	18	5	0
H10	Velingrad, Pazardjik	3	43	8	42
H11	Ovcha mogila, Svishtov, Veliko Tarnovo	1	24	6	0
H12	Banite, Smolian	2	23	6	6
Total		21	291	110	18

99

100 Questionnaires to gather information about the type of building construction and other information were
 101 handed out and collected. In some mineral deposits, such as Hissarya, Banya- Karlovo, Varshets,
 102 Velingrad, and Narechen, there are several thermal springs with different compositions and properties.
 103 Typically, the water from one such spring is used in the hospitals located at these places for treatment:
 104 in Banya and Karlovo water is utilized from three springs while in Velingrad two springs are used.



105

106 *Fig. 1 Location of the surveyed specialized rehabilitation hospitals with their codes*

107 The indoor radon (C_{Rn}) in treatment rooms, pools and offices on the basement and ground floor were
 108 measured with passive detectors. Measurements were also performed on the first, second and upper
 109 floors, but not in all premises. Radon CR-39 detectors in premises without water procedure were
 110 positioned on a shelf at a distance of approximately 1 – 1.5 m above the floor or any wall surface. In
 111 premises where water is used, such as swimming pools and bathrooms, the detectors were suspended
 112 via a rope from the ceiling or mounted on partitions separating showers, bathtubs, or treatment rooms.
 113 For the measurements of radon concentration in water (C_{Rnw}), samples were procured from the spring
 114 (borehole or casing) and from the treatment rooms (baths). The number of detectors, being divided into
 115 rooms in which water is used for treatment and ordinary premises (offices, doctors' offices, rooms) are
 116 presented in Table 1. In the rehabilitation hospitals, as with public facilities, there are losses of detectors

117 because they are visited by many people, and at the end of the exposure period, several of the detectors
 118 were missing. Higher losses were expected because the surveyed buildings are used by a lot of peoples.
 119 The total losses amounted to 18 %, and the distribution by branches is summarised in Table 1. The
 120 biggest losses were faced at the branches of Banya, Karlovo and Velingrad. The bathrooms, in these
 121 branches, are present in separate buildings and are visited by more people, which could explain the
 122 losses. Thus, the total number of analysing detectors were 401, with 291 detectors on premises where
 123 water was not used for treatment and 110 in premises with water procedures present, such as pools,
 124 baths, procedure rooms.

125 2.2. Indoor radon measurement

126 The indoor radon concentration (C_{Rn}) measurements in the premises of the hospital were performed
 127 using RSKS-type and RSFW-water protected type nuclear track detectors produced by Radosys. The
 128 RSKS-type detectors consisted of one CR-39 radon-sensitive chip while RSFW had two chips, enclosed
 129 in diffusion chambers. The latter has protection from high humidity and are specifically developed for
 130 conducting measurements of C_{Rn} in the premises of spas, caves, and mines. The detectors have a unique
 131 ID from the manufacturer, which was used to identify its movement from the laboratory to the room
 132 where the measurement was being performed and vice versa. Sampling, processing, and calculation of
 133 results were performed in accordance with ISO 11665-4 (2012). Further, the detectors from each batch
 134 were exposed to a standard radon atmosphere in an accredited laboratory in BfS Germany and the
 135 determination of the calibration coefficient (F_c) for each batch was performed in the laboratory of the
 136 National Center for Radiobiology and Radiation Protection in a manner similar to the processing of the
 137 detectors. The relative uncertainty of the calibration combined with the declared uncertainty of the
 138 accredited laboratory resulted in an estimated relative stationary deviation of the transit and exposure
 139 detectors of 3%. Further, the uncertainty was determinate considering the probability distribution of the
 140 results. The radon concentration was obtained by following the steps described in the ISO standard as
 141 well as applying equestrians for determination of activity and standard uncertainty.

142 Using Eq. 1 the indoor radon concentration C_{Rn} is determined due to calibration factor (F_c), net track
 143 density ($d - b$) and period of detector exposure (t):

$$144 C_{Rn} = F_c \cdot (d - b) \cdot t^{-1} \quad (1)$$

145 where d and b are the counted and background track density (number of tracks per unit area),
 146 respectively.

147 The relative combined uncertainty of result is determined by the formula as follows

$$148 u() = \sqrt{\left(\frac{u(F_c)}{F_c}\right)^2 + \left(\frac{u(d)^2 + u(b)^2}{(\bar{d} - \bar{b})^2}\right) + \left(\frac{u(t)}{t}\right)^2} \quad (2)$$

149 where $u(F_c)$, $u(d)$, $u(b)$ are the uncertainties of the calibration factor, standard deviation of the track
 150 density reading (d) (estimated by the microscope) and standard deviation of track density of the
 151 background group (b) of 10 detectors, respectively. Further, the uncertainty of the exposure period
 152 assuming a triangular distribution (Stojanovska, et. al., 2017) was determined as $u(t) = 1/\sqrt{6}$. Thus, the
 153 combined standard uncertainty of the method was assessed at 10 % (at 95 % confidence level). The
 154 minimum detectable concentration was 12 Bq/m³ for RSFW-water protected type and 18 Bq/m³ for
 155 RSKS-type. The detectors were deployed in the premises of the specialized hospitals in February, 2019
 156 and collected in June, 2019. In addition, the conservative assumption that the results of the indoor radon
 157 concentration obtained through the detector exposure over a period of 6 months (covering the winter
 158 and the spring season) represented the annual radon concentrations was considered in this study
 159 (Stojanovska et al., 2016).

160 2.3. Sampling and measurement of radon in water

161 The method based on Passive Environmental Radon Monitor (E-PERM) Electret Ion Chamber (EIC)
 162 system manufactured by Rad Elec Inc. was used for the measurement of the radon concentration in
 163 water, which consists of a reader, S-chambers and long (LT) or short –term (ST) electret, jars of 3.72 l
 164 volume and sample bottles of 68 and 136 ml. The water samples were collected using 136 ml collection
 165 bottles. Further, a bucket was used to till it overflowed, after the water ran for several minutes, and
 166 thereafter, raised such that the tap (or source) was below the surface. The sampling bottle was
 167 subsequently submerged and filled from the bottom of the bucket and capped underwater (Kotrappa,
 168 1999). Three parallel bottles from the sampling point were procured. Two of them were measured
 169 simultaneously, while the third was a control sample and measured when the results of the first two

170 differed. The notes for exact data and hour, ID of sample and duration of transport to laboratory were
 171 maintained. In the laboratory the sampling bottle was placed without cap at the bottom of the glass jar,
 172 and an E-PERM short-term chamber with a long-term electret or configuration of ionizing chamber - SLT
 173 was suspended over the water spread on the bottom. Subsequently, the jar was sealed and remained
 174 closed for 24-48 h and the exact duration of period was written in protocol of the sample. The evaluation
 175 of radon concentration in water (C_{RnW}) was based on radon concentration in air inside jar C_{Rnj} ,
 176 normalized to the volume of water sample and the jar and two periods. (T_d - the period utilized for
 177 collection of samples till immediately before insertion of the sample for analysis and T_a - the period
 178 utilized for inserting the sampling bottle into the measuring jar till the ionizing chamber is removed for
 179 analysis) The measurement of C_{Rnj} inside the jar was estimated under the voltage difference before and
 180 after exposure of detector in jar, gamma dose rate in laboratory and appropriate calibration factors, based
 181 on the procedure described by the producer (Rad. Elec. Inc., Frederick, Maryland, USA). Therefore, the
 182 C_{RnW} was calculated after measuring the C_{Rnj} by multiplying by the constants C_1 , C_2 and C_3 as follows

$$183 \quad C_{RnW} = C_{Rnj} \cdot C_1 \cdot C_2 \cdot C_3 \cdot \quad (3)$$

184 where, the constant C_1 considers the delay period between the collection of the water sample and the
 185 beginning of the measurement and is expressed as

$$186 \quad C_1 = e^{(\lambda \cdot T_d)}, \text{ as } \lambda=0.1814 \quad (4)$$

187 The constant C_2 is the constant based on the analysis period and is expressed as

$$188 \quad C_2 = \frac{\lambda \cdot T_a}{1 - e^{(-\lambda \cdot T_a)}} \quad (5)$$

189 The constant C_3 , is the ratio between the volume of the jar and that of the sampling bottle, and this case
 190 was equal to 28. In addition, the reader was regularly sent to the producer for calibration. The method
 191 was validated with the encapsulated ^{226}Ra source in water during the intercomparison (Kitto, et al.,
 192 2010) and the estimated combined uncertainties of the method was 20 % (at 95 % confidence level).

193 *2.4. Data analysis*

194 The results obtained were evaluated and systematized, and the information from the completed
 195 questionnaires was summarised for analysis. This was achieved by employing the SPSS (version 19)
 196 statistical software. In the analysis, depending on the distribution and homogeneity of the grouped C_{Rn}
 197 results, appropriate parametric and non-parametric statistical tests were used at a 95 % confidence level.
 198 Based on the data, the average transfer factor was set as the ratio of the radon concentration in the air to
 199 that in water in the treatment premises ($f_i = C_{Rn}/C_{RnW}$), which describes the transfer of radon from water
 200 to air. Although the transfer factor depends on the water temperature (Cosma et al., 2008), in this study
 201 the influence of temperature was neglected because the water temperature in the pools and baths of the
 202 hospitals were maintained at approximately the same temperature (approximately 30 °C). Depending on
 203 the temperature of the water in the springs, it is heated or cooled before being introduced into the baths.
 204 To assess the radon exposure of patients and workers in rehabilitation hospitals the annual effective dose
 205 (E) was estimated according the EU Radiation Protection N° 193 (2020) as follows

$$206 \quad E = C_{Rn} \cdot F \cdot t \cdot C_f \quad (6),$$

207 where E is expressed in mSv, C_{Rn} is the average indoor radon concentration in Bq/m^3 in premises with
 208 water procedure and F is the equilibrium factor between radon gas and its decay product. The value of
 209 the equilibrium factor, F , depends primarily on the indoor ventilation rate because of opening/shutting
 210 of windows, and the use of electric fans and air conditioners. Although the equilibrium factor in thermal
 211 spas, according to some authors varies from 0.2 (Vogiannis et al., 2004) to 0.6 (Soto and Gomez, 1999),
 212 the standard assumption of $F = 0.4$ was applied for calculation (UNSCEAR 2000; ICRP, 2017). Further,
 213 t is exposure time in hours. Effective doses of inhalation of radon in rehabilitation hospitals by a
 214 reference worker and patient were calculated assuming the breathing rate of $1.2 \text{ m}^3 \text{ h}^{-1}$, that is,
 215 approximately one-third of time spent sitting and two-thirds of time spent in light exercise. In addition,
 216
 217

218 for the calculation of radon effective doses, a dose coefficient of 3 mSv per mJ h m⁻³ (approximately 10
 219 mSv/WLM) corresponding to $C_f = 6.7 \cdot 10^{-6}$ mSv/[(Bq.h/m³)] was applied (ICRP, 2017). The dose
 220 coefficients were calculated using defined biokinetic and dosimetric models for reference person under
 221 particular exposure conditions as reference values and were not regarded as subject to uncertainty
 222 (ICRP, 2007). The sources of uncertainties in biokinetic models are associated with the types of
 223 information used to construct the models for the elements. Furthermore, the uncertainty in the dose
 224 assessment depends on uncertainties associated with measurements of radon concentration and sampling
 225 and uncertainties in the exposure scenario, including factors such as period of exposure. However, for
 226 regulatory purposes, the models and parameter values were fixed by convention.


227

228 3. Results and discussion

229 3.1. Radon concentration in air

230 *Figure 2 shows the histogram of C_{Rn} , measured in all premises considered in this study. It is noted that*
 231 *the C_{Rn} are generally lower, with the exception of 27 rooms in which the C_{Rn} are higher than reference*
 232 *level of 300 Bq/m³ as set by national legislation. In order to normalize the C_{Rn} data, the values were ln*
 233 *transformed. The hypothesis that $\ln C_{Rn}$ have a normal distribution was not confirmed at 95% confidence*
 234 *level.*

235

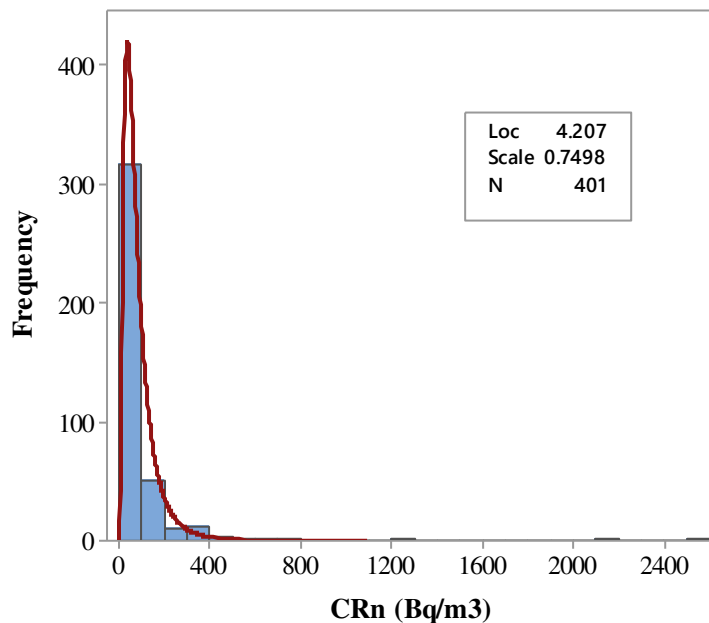

236

237 *Figure 2. Histogram of C_{Rn} fitted with log normal function*

238


239 To evaluate the spa region, the measured buildings were grouped by location and Table 2 presents the
 240 descriptive statistic and p -value of Shapiro–Wilk test for normality of $\ln C_{Rn}$ distribution ($p > 0.05$, 95 %
 241 confidence level). Considering the p values in Table 2, it follows that the ln-transformed results from
 242 most spa regions follow a normal distribution or the data are in the vicinity the mean value more often.
 243 However, the data of Narechenski Bani (H1), Pavel Banya (H5), Varshets (H6) and Velingrad (H10)
 244 spa regions do not exhibit a normal distribution. However, to avoid the influence of extreme values all
 245 further analyses were performed on $\ln C_{Rn}$. The reasons for inhomogeneity of the C_{Rn} can be many. The
 246 results of C_{Rn} are influenced by differences in geology between locations but also differences in
 247 premises. As a result, there is a wide range of C_{Rn} values between the locations and on the locations
 248 themselves. The measured C_{Rn} have a minimum value of 19 Bq/m³ in the Velingrad branch (H10) up to
 249 2550 Bq/m³ in . The significant difference between C_{Rn} in the different spa regions was confirmed by
 250 the Kruskal-Wallis test (KW, $p < 0.0001$). Furthermore, we tested the difference between C_{Rn} in each
 251 two regions separately via the Mann-Whitney test, which conforms to the assumption of their grouping
 252 Fig. 3. We find all differences are significant with $p < 0.05$ between the locations:
 253 H2 > H1, H3, H5 > H4, H6, H11 > H7, H10, H12 > H8, H9

254 The highest C_{Rn} was found at Momin Prohod (H2), which implies that it is a spa region with high radon.
 255 The variation coefficient was high too, indicating the high range of C_{Rn} . The average C_{Rn} of measured
 256 buildings in Momin Prohod were found higher than reference level of 300 Bq/m³. In a similar manner,
 257 C_{Rn} values were found to be high for the region of Niska Banja, Serbia by Žunić, et. al., (2006). In
 258 addition, the results of a survey conducted in Spain show a C_{Rn} of over 5000 Bq/m³ (Soto, J, et. al.,
 259 1995), which were higher than the results in Momin Prohod. Further, Narechen (H1), Banya-Karlovo
 260 (H3) and Pavel Banya (H5) were found to be the spa regions with moderate C_{Rn} values. These regions
 261 need to be further investigated in detail, and actions are required to inform the public in accordance with
 262 the national radon plan. The arithmetic mean value of C_{Rn} in the region with low radon in the range from
 263 30,9 Bq/m³ in Sandanski (H9) to 37 Bq/m³ in (H8). The coefficient of variation, which depicts the
 264 extent of variability in relation to the mean of the data in those regions, was also relatively small. The
 265 results from low radon spa region are in the similar variation range, as in the thermal baths of Rimini
 266 and Pesaro-Urbino provinces, Central Eastern Italy (7-71 Bq/m³), published by Desideri et.al (2004).
 267 Moreover, the C_{Rn} in five Slovenian spas, at Rogaska Slatina, Radenci, Moravci, Podcetrtek, and Catez
 268 were in the same low range, because of the effective ventilation systems (Vaupoti and Kobal, 2001).
 269

270 *Table 2. Descriptive statistics radon concentrations by location: N—number of measurements, AM—*
 271 *arithmetic mean, SDV—standard deviation, Min.—minimum, Max.—maximum, CV-coefficient of*
 272 *variation, GM—geometric mean and p-value of the Shapiro-Wilks test for normality.*

Code of location	Indoor radon concentration (C_{Rn})							
	N	AM, Bq/m ³	SDV, Bq/m ³	Min, Bq/m ³	Max, Bq/m ³	CV, %	GM, Bq/m ³	Shapiro–Wilk, p^*
H1	29	128.1	140.9	35	753	110	98	0.003
H2	48	335.7	482.3	37	2550	144	196	0.061
H3	21	103.9	58.1	45	305	56	93	0.358
H4	30	67.5	38.4	21	176	57	58	0.568
H5	46	111.6	76.3	33	392	68	95	0.052
H6	48	67.5	32.9	32	237	49	62	0.007
H7	20	50.4	21.1	22	91	42	46	0.424
H8	26	37.0	11.0	23	60	30	35	0.145
H9	23	30.9	7.3	21	47	24	30	0.447
H10	51	51.7	28.1	19	117	54	45	0.011
H11	30	60.3	22.6	33	120	37	57	0.284
H12	29	51.4	19.3	24	90	37	48	0.267
Total	401	102.3	195.3	19	2550	191	67	< 0.0001

273 $*p > 0.05$ (95% confidence level)

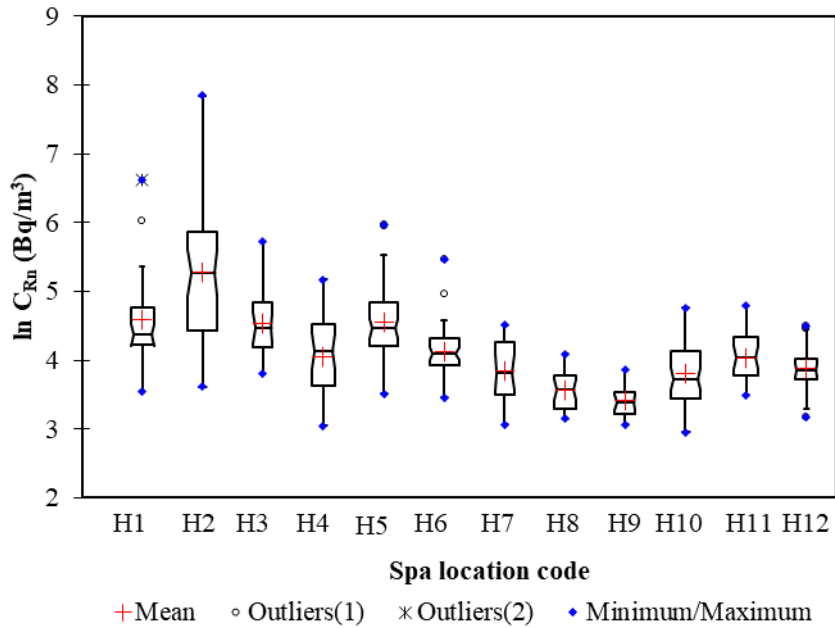


274

275 *Fig. 3 The boxplots of C_{Rn} distribution by location of the surveyed specialized rehabilitation hospitals*

276 For a more detailed assessment of the radon variations in the buildings, the results were grouped based
 277 on the type of premises, whether water was used for treatment and room types such as ordinary rooms
 278 or offices on the underground and ground floor only.

279

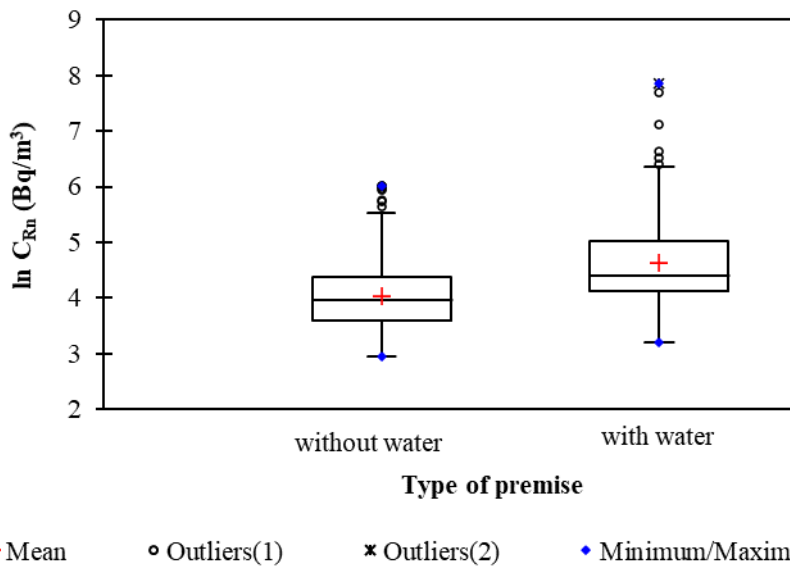


280

281 *Fig. 4 The boxplots of C_{Rn} by type of premises in the surveyed specialized rehabilitation hospitals*
 282 *according the used of water in them*


283 The arithmetic mean value for the procedure rooms was calculated to be $AM = 186 \text{ Bq/m}^3$, which was
 284 approximately three times higher than in rooms without water procedures ($AM = 77 \text{ Bq/m}^3$).
 285 Subsequently, a non-parametric Mann-Whitney test was applied for the two groups of rooms and a
 286 statistically significant difference ($MW, p < 0.001$) was found. Fig. 4 shows the comparison of the results
 287 between the premises with water procedures (treatment rooms) to those without them.

288 For further assessment of the distribution of radon concentration by floors, the results are grouped into
 289 four groups as follows: underground; ground floor; first floor and above the first floor (Fig 5).

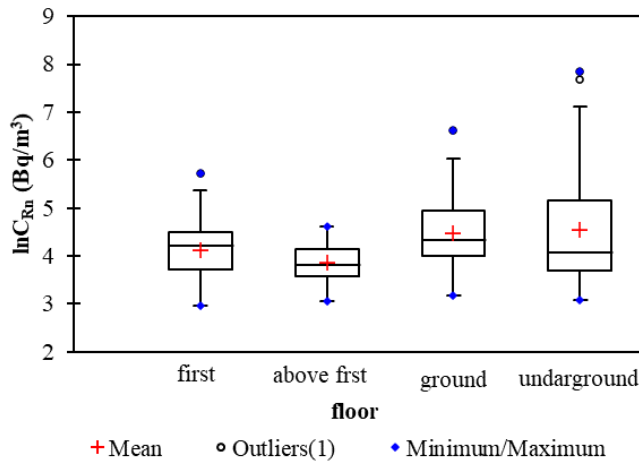

290
291 *Fig. 5 The boxplots of $\ln C_{Rn}$ by floors in the surveyed specialized rehabilitation hospitals*

292 Subsequently, a non-parametric Kruskal-Wallis test was applied and a statistically significant difference
 293 between the groups (KW, $p < 0.001$) was confirmed. To further check between which groups a difference
 294 existed, the Mann-Whitney rank test was used for all couples and no statistically significant difference
 295 was observed between the underground, ground and first floor. However, a difference was found
 296 between the group with results above the first floor and the lower floors (MW, $p < 0.001$) which can be
 297 explained by the location of most treatment premises on the lower floors. This finding suggest that water
 298 could be an significant source of radon in most premises. It can be noticed from Fig. 6, the C_{Rn} in the
 299 underground rooms without water treatment are much lower than in the treatment rooms where the water
 300 further increases the C_{Rn} . Given that the most treatment rooms are located on the ground floor, we
 301 assume that radon from the water further increases the indoor concentration in all rooms. On the first
 302 and upper floors, the effect of geogenic radon weakens and the C_{Rn} decreases in rooms without
 303 treatments. In the treatment rooms on those floors, the C_{Rn} is almost the same, indicating that water is
 304 an additional source of indoor radon.

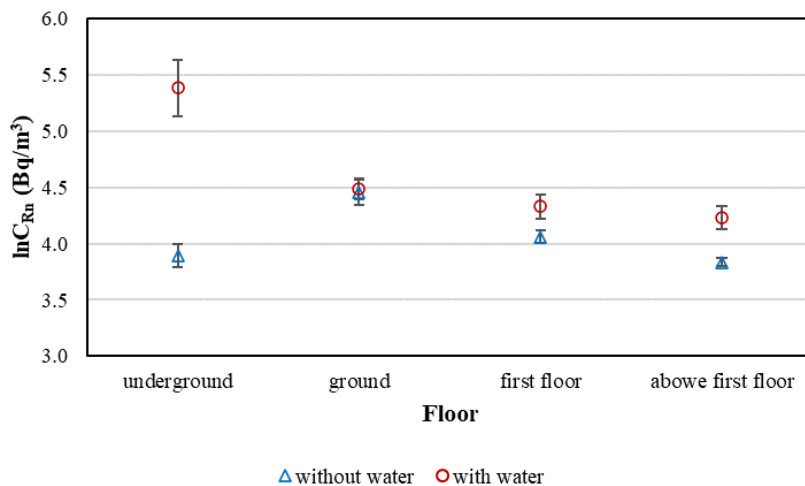

305
306 *Fig. 6 The mean values of $\ln C_{Rn}$ grouped by the type of premise and floor*

307 3.2. Radon concentration in water

308 The results of the concentration of radon in the mineral water from springs and baths by location are
 309 presented in Table 3. The measurements show that the concentration of radon in the mineral water taken
 310 from the baths in the hospitals has decreased up to 50 % till the water reaches the bath premises. This
 311 was expected, as in some places the water collects in tanks or reaches the hospital through pipes, where
 312 the radon emanates or decays to its daughter products. For each branch, the arithmetic mean in the
 313 treatment rooms were estimated and are presented in Table 3.


314 In the rehabilitation hospitals at Banya, Karlovo (H3) and Velingrad (H10), thermal water is used
 315 directly in the bathroom from the spring. The C_{RnW} from the springs at Narechenski Bani (H1), Momin
 316 Prohod (H2), Pavel Banya (H5) and Velingrad (H10) were above the standards set by both the European
 317 Union reference level set at 100 Bq/l (EU, 2001) and limit for drinking water as imposed by the
 318 Bulgarian regulation. Such high values of C_{RnW} were reported by many other authors of several
 319 countries, as in Venezuela (Pugliese, et.al. 2014), Niška Banja Serbia (Žunić, et. al., 2006), and Spain
 320 (Soto, et.al., 1995). Further, the calculated radon transfer coefficients are presented in Table 3. The range
 321 of the transfer coefficients were similar to those in Stubica, Croatia (Radolić, et, al., 2005), but in most
 322 hospital bathrooms it was higher than the typical estimated values from shower for normal water of
 323 approximately 10^{-4} (Nazaroff and Nero, 1988; Vinson, et, al., 2008).

324
 325 *Table 3. Radon concentrations in springs and bath water, average radon concentration in bath air*
 326 *and treatment premises and their respective transfer coefficients*

Specialized hospital for rehabilitation (Code of location)	Temperature of water, °C	C_{RnW} , Bq/l (spring)	C_{RnW} , Bq/l (bath)	AM C_{Rn} , Bq/m ³ (treatment premises)	Transfer coefficient
Narechenski Bani(H1)	28	613	189	186	$9.8 \cdot 10^{-3}$
Momin Prohod (H2)	64.5	1265	270	795	$2.9 \cdot 10^{-3}$
Banya, Karlovo (H3) - men's bath	25	19		125	$6.6 \cdot 10^{-3}$
Banya, Karlovo (H3) - women's bath	26	17		138	$8.1 \cdot 10^{-3}$
Banya, Karlovo (H3) –central spring	34,5	58		166	$2.9 \cdot 10^{-3}$
Hissarya (H4)	45	30	15	62	$4.1 \cdot 10^{-3}$
Pavel Banya (H5)	61	428	223	95	$4.3 \cdot 10^{-4}$
Varshets (H6)	37,6	22	31	72	$2.32 \cdot 10^{-3}$
Bankya (H7)	23	24	4.3	36	$8.37 \cdot 10^{-3}$
Kyustendil (H8)	73	6	11	45	$4.02 \cdot 10^{-3}$
Sandanski (H9)	72	30	23	28	$1.21 \cdot 10^{-3}$
Velingrad (H10) – Kamena spring	47	222		86	$3.87 \cdot 10^{-4}$
Velingrad (H10) – Veliova bania spring	63	110		135	$1.23 \cdot 10^{-3}$
Ovcha mogila (H11)	45	159	32	77	$2.41 \cdot 10^{-3}$
Banite, Smolian (H12)	42	14	16	78	$4.88 \cdot 10^{-3}$

327
 328 Spearman's rank correlation coefficient was used to assess the relationship between the concentration of
 329 radon in mineral water and in indoor air. The test is statistically significant ($p < 0.05$ at 95% confidence
 330 interval) and Spearman's correlation coefficient between the C_{RnW} from baths and C_{Rn} was $\rho_0 = 0.806$.
 331 The correlation analysis showed that 65 % ($\rho^2 = 0.65$) of radon measurements in air can be explained by
 332 the presence of radon in bath water, that is, high values of radon in the air could be expected to be found
 333 if there are high values of radon in the water. To systematize the results and link them to hydrogeology,
 334 the C_{RnW} results from the springs were grouped by the hydrogeological regions of the country. Bulgaria
 335 has been divided into three major hydrogeological regions, which is closely linked to the main geological
 336 structures, namely, low Danubian Artesian, intermediate, and Rila–Rhodope (Benderev, et. al., 2016;
 337 Hristov, et. al., 2019).

338 Results of radon concentration in water from springs by their hydrogeological region are presented on
 339 Fig. 7. The lowest arithmetic mean of the C_{RnW} from springs (25.7 Bq/l) was found for the intermediate
 340 hydrogeological region, while the highest was for the Rila–Rhodope region (375.5 Bq/l). There was no
 341 statistically significant difference in the results of the C_{RnW} by their hydrogeological regions, which
 342 indicates that radon in water may be influenced by additional factors and a more detailed study of the
 343 geology of spa areas should be performed.

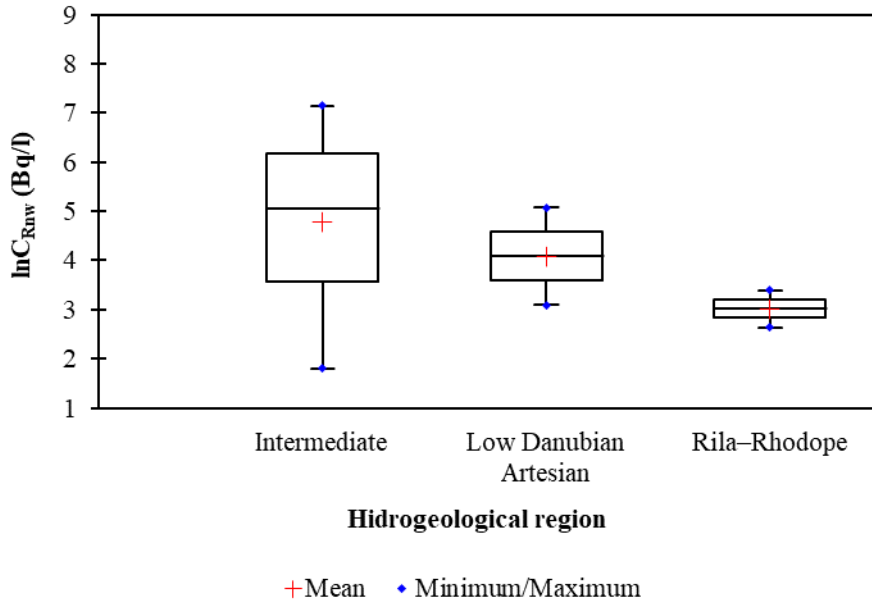

344
345 *Fig. 7 The boxplots of $\ln C_{RnW}$ from springs by hydrogeological regions in Bulgaria*

346
347 *3.3. Estimation of exposure to radon*

348 Based on the average C_{Rn} in the premises and Eq. 4, the average annual effective dose to workers and
349 patients because of radon exposure, was estimated. Depending on the place of work the doses of workers
350 were evaluated for premises with water procedures and those without. In addition, the effective dose
351 depends on the exposure period and it was estimated based on the time that the persons stay on the
352 premises.

353
354
355
356 *Table 4. Estimated effective doses from radon inhalation by specialized hospital for rehabilitation of*
357 *workers and patients*

Specialized hospital for rehabilitation (Code of location)	Dose of public (patients), E, mSv/year	Dose of workers in premises with water, E, mSv/year	Dose of workers in premises without water, E, mSv/year
Narechenski Bani(H1)	0.15	8.8	1.3
Momin Prohod (H2)	0.25	14.4	2.0
Banya, Karlovo (H3)	0.06	2.0	1.0
Hissarya (H4)	0.02	0.7	0.9
Pavel Banya (H5)	0.04	1.1	1.6
Varshets (H6)	0.03	0.8	0.9
Bankya (H7)	0.01	0.4	0.7
Kyustendil (H8)	0.01	0.5	0.5
Sandanski (H9)	0.01	0.3	0.4
Velinograd (H10)	0.01	1.6	0.6
Ofcha mogila (H11)	0.02	0.9	0.8
Banite, Smolian (H12)	0.02	0.9	0.6

359 The main uncertainty in calculation of effective dose was the exposure period, which was applied. The
360 working hours in the premises with water therapy, such as, swimming pools, bathtubs, tangents, and
361 others have been reduced and are 1750 hours per year. In contrast, at the other workplaces in the
362 rehabilitation hospitals the working hours are 2000 hours a year. To calculate the additional annual
363 effective dose (E , $\mu\text{Sv}/\text{y}$) of a patient receiving a full treatment programme, it was considered that each
364 patient receives 30 treatments annually (one month) of 1-hour duration in the pool, bath, or other
365 premises with water. The estimated effective doses from radon inhalation by specialized hospitals for
366 rehabilitation of workers and patients are presented in Table 4. The effective doses because of radon
367 inhalation of workers in premises with water were higher and varied from 0.3 to 14.4 mSv/y depending
368 to radon concentration in rehabilitation hospitals. As expected, the workers in the rehabilitation hospital
369 at Momin Prohod received the highest dose. The effective doses of the workers were in range of the
370 assessed doses of workers in the thermal spas of Ischia Island (Pugliese, et, al., 2014). In contrast, the
371 estimated effective doses of radon inhalation for patients are relatively low and range from 2.0 to
372 250 $\mu\text{Sv}/\text{year}$. Though these doses do not exceed the limit of the annual effective dose for the population
373 from all sources (1 mSv/year), in some regions (Narechenski Bani and Momin Prohod) they were higher
374 than the levels of exemption of 10 $\mu\text{Sv}/\text{year}$ according to the Bulgarian legislation standards.

375 **4. Conclusion**

376 Radon measurements in the air and geothermal water of 12 Bulgarian rehabilitation hospitals were
377 performed and the indoor radon concentrations and water of the springs and baths were obtained in the
378 range of 19 to 2550 Bq/m³, 6 to 1265 Bq/l and 4.3 to 270 Bq/l, respectively. The correlation analysis
379 was used to test relationships between the data of the concentration of radon in the mineral water and in
380 the air in the treatment rooms and the Spearman's rank correlation coefficient was calculated to be
381 $\rho=0.806$, which proves that the connection of the levels of indoor radon is related to those of the water.
382 Further, the difference in radon concentration in the premises with water therapy and those without was
383 confirmed. The results clearly show that thermal water with high radon concentration is the source of
384 radon in buildings. In addition, the analysis and assessment of exposure to radon confirmed the need of
385 radon control in spas to adhere to the European Basic Safety Standard (EU BSS, Council Directive
386 2013/59/Euratom, 2014), which could be realized by inspecting the ventilation system, an important
387 part for improving the indoor environment in spa. The five spa regions were identified according the
388 indoor radon concentration which could be used to apply a graded approach in the control of spas.
389 Further, an analysis of the results of radon concentration in water from springs by their hydrogeological
390 regions was performed. Intermediate hydrogeological region had the lowest arithmetic means of the
391 C_{RnW} from springs ($C_{\text{RnW}}=25.7$ Bq/l), while Rila–Rhodope region had the highest ($C_{\text{RnW}}=375.5$ Bq/l).
392 Further detailed study of the geology of spa areas should be performed for assessment of the factors that
393 influence the radon concentration in water. Finally, the estimation of annual effective doses for workers
394 and patients were evaluated considering the exposure period and the measured indoor radon
395 concentration. Although the study was done in only 12 regions with mineral water in the specialized
396 rehabilitation hospitals, the results concerning the indoor radon and water variation could be used to
397 optimize future radon surveys in buildings with public access as spa centres.

398 **Ethical Approval and Consent to Participate**

399 We declare that this manuscript is original, has not been published before and is not currently being
400 considered for publication elsewhere. No data, text, or theories by others authors are presented, except
401 the citations on manuscript. The results are measured and analysed by authors of the manuscript.

402 Our manuscript not involving human participants, human data or human tissue and animals.

403 **Consent to Publish**

404 Not applicable

405 **Funding**

406 This work is supported by the Bulgarian National Science Fund of the Ministry of Education and Science
407 (Project КП-06-H23-1/2018 r).

408 **Authors Contributions**

409 All authors contributed to the study conception and design. Material preparation, data collection and
410 analysis were performed by Desislava Djuvnakova, Kremena Ivanova and Bistra Kunovska. Statistical
411 analysis was done by Zdenka Stojanovska. The first draft of the manuscript was written by Jana Jounova
412 and Nina Chobanova and all authors commented on previous versions of the manuscript. All authors
413 read and approved the final manuscript. Corresponding author is Kremena Ivanova.

414 **Competing Interests**

415 The authors declare that they have no competing interests

416 **Availability of data and materials**

417 The datasets generated and analysed during the current study are available in the NCRRP data base and
418 are available from the corresponding author on reasonable request. The data report are publicly available
419 on the www.radon.bg

420 **References**

- 421 Benderev, A., Hristov, V., Bojadgieva, K., and Mihailova, B. (2016). Thermal waters in Bulgaria. In
422 Environmental Earth Sciences. Springer; Cham, (47-64).
- 423 Cosma, C., Moldovan, M., Dicu, T., and Kovacs, T. (2008). Radon in water from Transylvania
424 (Romania). Radiation Measurements, 43(8), 1423-1428.
- 425 Desideri, D., Bruno, M. R., and Roselli, C. (2004). 222 Rn determination in some thermal baths of a
426 central eastern Italian area. Journal of Radioanalytical and Nuclear Chemistry, 261(1), 37-41.
- 427 European Commission (2020). Radiation protection n° 193 Radon in workplaces, Directorate-General
428 for Energy Directorate D—Nuclear Energy, Safety and ITER Unit. Radiation Protection and
429 Nuclear Safety, D3.
- 430 European Commission (2013). Laying down basic safety standards for protection against the dangers
431 arising from exposure to ionising radiation, and repealing, Council Directive
432 2013/59/EURATOM. OJ of EU, L13/1.
- 433 European Commission, (2001). European Union Commission Recommendation on the protection of the
434 public against exposure to radon in drinking water supplies. Office Journal of the European
435 Community, L 344, 28 December, 85-88.
- 436 International Organization for Standardization (2012). Measurement of radioactivity in the
437 environment—Air: Radon-222. Part 4: Integrated measurement methods for the determination of
438 the average Radon activity concentration in the atmospheric environment using passive sampling
439 and delayed analysis. ISO 11665-4:2012.
- 440 International Commission on Radiological Protection (2017). Occupational intakes of radionuclides:
441 Part 3. Annals of the ICRP, 46. ICRP Publication, 3/4, 137.
- 442 International Commission on Radiological Protection (2007) Protection, radiological. Annals of the
443 ICRP, 37, ICRP Publication, 2(4), 2, 103.
- 444 Hristov, V., Trayanova M., and Kolev S. (2016). Mineral water and geothermal energy application in
445 Bulgaria. National Conference with international participation “GEOSCIENCES 2016”,
446 Bulgarian Geological Society, 149-150 (in Bulgarian).
- 447 Hristov, V., Stoyanov, N., Valtchev, S., Kolev, S., and Benderev, A. (2019). Utilization of low enthalpy
448 geothermal energy in Bulgaria. In IOP Conference Series. Earth and Environmental Science (Vol.
449 249, No. 1, p. 012035). IOP Publishing.
- 450 Kamenova-Totzeva, R. M., Totzev, A. V., Kotova, R. M., and Ivanova-Teneva, G. R. (2018).
451 Quantitative and qualitative study of radon content in Bulgarian mineral waters. Radiation
452 protection dosimetry, 181(1), 48-51.
- 453 Kitto, M. E., Menia, T. A., Bari, A., Fielman, E. M., and Haines, D. K. (2010). Development and
454 intercomparison of a reusable radon-in-water standard. Radiation measurements, 45(2), 231-233.

455 Kotrappa, P. (1999). E-PERM electret ion chambers for measuring Radon in water. E-PERM System
456 Manual. Rad Elec Inc., 1-13.

457 Manic, G., Petrovic, S., Vesna, M., Popovic, D., and Todorovic, D. (2006). Radon concentrations in a
458 spa in Serbia. *Environment International*, 32(4), 533-537.

459 Nazaroff, W. W. and Nero, A. V. (1988). Radon and its decay products in indoor air.

460 Nikolopoulos, D., Vogiannis, E., Petraki, E., Zisos, A., and Louizi, A. (2010). Investigation of the
461 exposure to radon and progeny in the thermal spas of Loutraki (Attica-Greece): Results from
462 measurements and modelling. *Science of the Total Environment*, 408(3), 495-504.

463 Pugliese, M., Quarto, M., and Roca, V. (2014). Radon concentrations in air and water in the thermal
464 spas of Ischia Island. *Indoor and Built Environment*, 23(6), 823-827.

465 Radolić, V., Vuković, B., Šmit, G., Stanić, D., and Planinić, J. (2005). Radon in the spas of Croatia.
466 *Journal of Environmental Radioactivity*, 83(2), 191-198.

467 Soto, J., Fernandez, P. L., Quindos, L. S., and Gómez-Arozamena, J. (1995). Radioactivity in Spanish
468 spas. *Science of the total environment*, 162(2-3), 187-192.

469 Soto, J. and Gómez, J. (1999). Occupational doses from radon in Spanish spas. *Health Phys.* 76, 398–
470 401.

471 Stojanovska, Z., Boev, B., Zunic, Z. S., Ivanova, K. G., Ristova, M., Tsenova, M., Ajka, S., Janevik, E.,
472 Taleski, V., and Bossew, P. (2016). Variation of indoor radon concentration and ambient dose
473 equivalent rate in different outdoor and indoor environments. *Radiation and Environmental*
474 *Biophysics*, 55(2), 171-183.

475 Stojanovska, Z. A., Ivanova, K., Bossew, P., Boev, B., Žunić, Z. S., Tsenova, M., Surguz, Z., Kolar, P.,
476 Zdravkovska, M., and Ristova, M. (2017). Prediction of long-term indoor radon concentration
477 based on short-term measurements. *Nuclear Technology and Radiation protection*, 32(1), 77-84.

478 Szerbin, P. (1996). Natural radioactivity of certain spas and caves in Hungary. *Environment*
479 *International*, 22, 389-398.

480 UNSCEAR (2000). Sources and effects of ionising Radiation, Volume 1. Report to the General
481 Assembly with Scientific Annexes. Annex B. Exposures from natural radiation sources.
482 UNSCEAR 2000 Report. United Nations: New York.

483 Vassileva, S. (1996). Mineral water and spas in Bulgaria. *Clinics in Dermatology*, 14(6), 601-605.

484 Vinson, D. S., Campbell, T. R., and Vengosh, A. (2008). Radon transfer from groundwater used in
485 showers to indoor air. *Applied Geochemistry*, 23(9), 2676-2685.

486 Vogiannis, E., Nikolopoulos, D., Louizi, A., and Halvadakis, C. P. (2004). Radon variations during
487 treatment in thermal spas of Lesvos Island (Greece). *Journal Environmental Radioactivity*, 75(2),
488 159-170.

489 WHO (2009). In: *Handbook on Indoor Radon: A Public Health Perspective*. Zeeb, H. and Shannoun, F.,
490 Eds. World Health Organization.

491 Žunić, Z. S., Kobal, I., Vaupotič, J., Kozak, K., Mazur, J., Birovljev, A., Janik, M., Celiković, I., Ujić,
492 P., Demajo, A., Krstić, G., Jakupi, B., Quarto, M., and Bochicchio, F. (2006). High natural
493 radiation exposure in radon spa areas: A detailed field investigation in Niška Banja (Balkan
494 region). *Journal of Environmental Radioactivity*, 89(3), 249-260.

495