

Life Cycle Assessment of opencast lignite mining

Lukasz Lelek (✉ lelek@meeri.pl)

Instytut Gospodarki Surowcami Mineralnymi i Energia PAN <https://orcid.org/0000-0002-3414-5123>

Joanna Kulczycka

Akademia Górniczo-Hutnicza im Stanisława Staszica w Krakowie Wydział Zarządzania: Akademia Górniczo-Hutnicza imienia Stanisława Staszica w Krakowie Wydział Zarządzania

Case study

Keywords: LCA, lignite, mining, fossil fuel

Posted Date: November 24th, 2020

DOI: <https://doi.org/10.21203/rs.3.rs-68744/v1>

License:  This work is licensed under a Creative Commons Attribution 4.0 International License.

[Read Full License](#)

Life Cycle Assessment of opencast lignite mining

Lukasz Lelek · Joanna Kulczycka

Received: date / Accepted: date

Abstract The life cycle phase of fossil fuel extraction is mainly considered in the LCA when evaluating the energy production processes. It is then only one of many unit processes, which contribute to the blurring of mining-relevant results. There are few items in the literature focusing exclusively on the lignite mining phase and analysing the specific mining conditions and associated environmental impacts. The article focuses on the LCA of lignite mining processes on the basis of data coming from a Polish mine. The technology for opencast lignite mining is noted for its high production efficiency, high level of recovery and lower risk as regards the safety of workers when compared with underground mining systems. However, the need to remove large amounts of overburden to uncover the deposit contributes to a much greater degradation of the landscape. Analysing the results obtained, several key (hot spot) elements of the lignite mining operations were distinguished for modelling the environmental impact, i.e.: calorific value, the amount of electricity consumption, the manner in which waste and overburden are managed. As a result there is a high sensitivity of the final indicator to changes in these impacts.

Keywords LCA · lignite · mining · fossil fuel

1 Introduction

The EU's climate policy, including the European Green Deal announced last year, is intended to achieve climate neutrality for the continent. This is mainly

Lukasz Lelek
Mineral and Energy Economy Research Institute, Polish Academy of Sciences, Wybickiego
7A Str., 31-261 Cracow, Poland
Tel.: +48 12 617 16 52
Fax: +48 12 632 22 45
E-mail: lelek@meeri.pl

Joanna Kulczycka
Faculty of Management, AGH University of Science and Technology, 30-067 Cracow, Poland

to be achieved through the transformation of the energy sector by reducing the burning of fossil fuels and moving towards a net-zero emissions strategy[12] by supporting the development of renewable energy sources together with energy storage e.g. using hydrogen, CO₂ offsetting, sustainable production and consumption practices [26], etc.

EU has a significantly lower emissions intensity of power generation than other large economies. The carbon intensity was 270 grammes of CO₂ per kilowatt-hour (gCO₂/kWh) in 2018, compared with over 400 g CO₂/kWh in the United States, over 500 gCO₂/kWh in Japan, around 600 gCO₂/kWh in the People's Republic of China and over 700 gCO₂/kWh in India and Australia [13]. Therefore, fossil fuels such as coal still constitute a significant source of energy in the world and in the EU. Coal consumption in the EU has fallen by 34% since 1995 and production by 53%. Dependence on coal imports, however, has increased to 40% with 30% of this demand coming from Russia, even though the share of coal in the EU energy mix has decreased to 15%. There are several factors affecting the future use of coal, these undoubtedly including climate considerations, but also security of supply. This factor has contributed to a reduction in coal use in some import-dependent countries which rely on this resource, but coal also provides energy security for those countries with their own resources like Poland. It should be pointed out that the Lisbon Treaty allows each Member State to decide on its energy mix. The European Council therefore recognises the need to ensure energy security and respect the right of Member States to decide on their energy mix and to choose the most appropriate technologies [25]. The recent announcements of a gradual phasing out of coal-fired power plants are expected to lead to a further reduction in demand for coal, which will affect the development of other energy carriers such as gas, renewable or nuclear. The "Coal Regions in Transition" platform [7] and dedicated policy instruments are expected to contribute to mitigating the social impact, especially for European regions associated with coal mining activities and therefore the transformation of coal-dependent regions will probably take several decades as coal-fired power plant still provides a high share of global capacity – 38% in 2019 [28]. Analysing various scenarios prepared by the IEA (International Energy Agency) for the development of the energy sector until 2040, it can be seen that this share will decrease. However, under different scenarios it may still remain at a significant level of 25% (Stated Policies 2040 Scenario) or will be greatly reduced to 4% (Sustainable Development 2040 Scenario).

In the case of lignite, global consumption in 2018 was 793.5 million tonnes, with total demand for coal (brown, hard and coking coal) amounting to 5458 million tonnes [6]. In Poland, its share in electricity production in 2019 was 24.5% (41.5 TWh) which was 15% less than in 2018. This was associated, as in the global market, with a general decline in energy production (3.9%), with historically the lowest share of energy generated from coal in the domestic energy mix (74%) as well as the highest import of energy (10.6 TWh). This situation is mainly due to the increase in labour costs, lower quality of the fuel extracted (average calorific value below 7.9 MJ/kg) and high charges for

CO₂ emissions. These aspects translate into a decrease in the competitiveness of energy from coal in relation to other sources, including renewable ones. According to the current draft of the Energy Policy for Poland until 2040, it is predicted that in the next 10 years the share of coal in the production of electricity will drop to about 60%. Therefore, it is imperative to explore new theories and technologies that ensure high safety, low environmental pollution, and low damaging impact during coal mining [17]. Moreover, it is crucial to analyse the impact during the whole life cycle. The literature review [15] shows that there is a lack of modelling of the impact of mining processes based on the LCA methodology which also takes into account the quality of the fuel obtained. Even though Poland is one of the largest producers of coal in the EU, LCA and holistic assessment is still relatively rare [5][19]. The items available underline some methodological inconsistencies, which may be the reason for the small number of LCA studies undertaken in the mining industry. These include, problems with the selection of an appropriate functional unit, the limits of the system analysed or the determination of the weight of particular impact categories reflecting significant environmental problems in mining. Some of the cases in the literature [27][30][29][1] indicate that the environmental burdens obtained from the calculation of the LCA for the coal consumption and energy production system cannot be regarded as informative indicator scores since they do not provide a means for practical decision-making in terms of performance (neither negative nor positive). This lack of informative indicator scores makes it difficult for industrial practitioners to make sense of the environmental burdens (results of a traditional LCA study) according to the values obtained for each environmental category [14].

In recent years some harmonisation in LCA methodology [22] has been proposed. In addition, there is a lack of detailed data consistent with the quality requirements of the LCA methodology on the basis of which it would be possible to conduct comparative analyses between individual mining enterprises. The environmental impact of a mine depends to a large extent on the geological and deposit conditions, the thickness of the deposit, its depth, etc. These aspects determine, for example, the amount of overburden to be removed or the depth of the shaft and the length of galleries to be prepared. Such conditions have a significant impact on the LCA results.

2 State of the art

The life cycle phase of fossil fuel extraction is mainly considered in the LCA assessment when evaluating the energy production processes. It is then only one of many unit processes, which contribute to the blurring of mining-relevant results [8][24]. There are few items in the literature focusing exclusively on the lignite mining phase and analysing the specific mining conditions and associated environmental impacts. The reasons for this may include, among other considerations, problems with the selection of an appropriate functional unit, the limits of the system analysed, or the determination of appropriate impact

categories to reflect the significant environmental problems associated with mining. The article focuses on the analysis of lignite mining processes on the basis of data coming from a Polish mine. The technology for opencast lignite mining is noted for its high production efficiency, high level of recovery and lower risk as regards the safety of workers when compared with underground mining systems. However, the need to remove large amounts of overburden to uncover the deposit contributes to a much greater degradation of the landscape. From the analyses of this area available in the literature, the work of Şengül H. et al. regarding the LCA of opencast lignite mines based on high quality data from 12 mines in Turkey, including 9 opencast mines, should be quoted [23]. It is also noted in this work that the impacts related to the combustion phase in LCA of coal based production of electricity have so far been the subject of more LCA studies and are better documented. On the basis of the results obtained, it was found that the main environmental impacts are related to the consumption of electricity and diesel oil, waste from the mechanical processing of coal and its washing, as well as belt conveyors used to transport the coal extracted. The analyses show that the proposed alternatives to the dewatering of the mechanical treatment of waste and coal recovery may contribute to a 40% improvement in the eco-toxicity potential in the water impact category through simple changes in mining practices. Analyses of lignite mining processes in open-pit mines are also presented in the work of Mangena S.J. and Brent A.C [21]. The authors conduct an LCA assessment of four South African mines producing low and high quality coal, including two open-pit and two underground mines. The publication noted that the standard impact categories, i.e. global warming, ozone depletion, human toxicity, water ecotoxicity, acidification, eutrophication, are not sufficient to describe the environmental impact of mineral extraction. The categories of land occupancy, water consumption, energy use and resource depletion have been proposed as the most relevant and equivalent for the LCA analysis of open pit mining. However, there is an ongoing debate among practitioners and scientists about the principles of the different LCA models developed over the last 30 years and the indicators for resource use categories. No compromise has yet been reached on which of them represent the best state-of-the-art [18]. The most commonly used model is the so-called abiotic depletion potential ADP and it is based on the analysis of current consumption of the reserves (extraction rate, present use) in relation to balanced resources. It is the basis for many LCIA (Life Cycle Impact Assessment) methods currently used [10][9]. However, taking into account the problems of modern mining, in which, apart from environmental and economic aspects, social aspects, rational deposit management and energy security are also taken into account, this indicator is considered insufficient in the process of making investment decisions or regulations concerning raw materials, as it may cause the risk of misinterpretation of the results obtained. In addition to the ADP model, the resource depletion rate in terms of their calorific value (in MJ) is also used as an indicator. However, the method does not assess the environmental impact based on any dependencies (e.g. availability of resources), but only provides information about the amount of fossil

fuel extracted in terms of its total energy value. The data presented in the publication show that, in the case of open-pit mines, the environmental effects related to the high degree of land degradation reflected in the land use category are significant [2]. Therefore, land reclamation and land management after the closure of the mine will be an important factor. This problem is highlighted in many publications referring to mining and its impact on SDG (Sustainable Development Goals) adopted in 2015 by the United Nations General Assembly in the form of a universal, integrated and transformative 2030 Agenda for Sustainable Development, along with a set of 17 SDG and 169 associated targets [3][11].

Factors resulting from geological conditions, such as the ratio of overburden to the amount of coal in the seams that are exploited also translate directly into this category and into the indicators related to the energy necessary to remove the overburden. The mineral content of coal, on the other hand, influences the intensity of its processing and enrichment, which is directly related to the quality of the coal extracted.

3 The Polish situation

At present the mines extracting lignite in Poland are struggling to expand their current areas of mining activity or to obtain licences to open new opencast operations. This is mainly due to the direct environmental impact of opencast operations and high level of social opposition to this issue. The reserves in the existing deposits in Poland and the remaining time of exploitation of the existing lignite power units associated with this are currently predicted to be from ten to a dozen years. The opening or expansion of new open-pit mines would extend operations to 2044 for Elektrownia Turow and to 2036 for Elektrownia Patnow II. In the case of the Belchatów Power Plant, which is the largest facility of this type in the world, the current reserves of the Szczercow open pit mine will allow it to operate until 2037. Moreover, the power plant has a plan for a new open pit in Zloczew which will contribute to the possibility of extending this operation for another 39 years. However, due to strong public opposition, this project may not commence operations.

New investments in supercritical lignite-fired units, including 858 MW of capacity commissioned in Belchatow Power Plant in 2011, a 474 MW unit in 2008 in Patnow II Power Plant, and 496 MW in Turow Power Plant expected to be commissioned in 2020, prove that this fuel may still have a significant share in the national power mix over the next few decades of power sector transformation. It is worth noting that the above-mentioned units are currently some of the most modern in the country and their (net) efficiency ranges from 41 to 43%, which is significantly higher than that of the existing units (including those burning hard coal). Moreover, they meet strict environmental standards, often emitting several times less SO₂ and dust than the units currently operating in the country. According to the BREF reference document for large combustion plants [16], the Belchatow and Patnow Power Plants will have,

additionally, to adapt their units to new emission requirements, which will contribute to further reducing their emissions. Also taking into account economic factors, it should be noted that energy produced from lignite is one of the cheapest, calculated per MWh. The sharply growing fees for CO₂ emissions in recent years are one of the main tools of the EU decarbonisation policy and significantly reduce the profitability of these installations. At the same time, CO₂ sequestration technologies are becoming increasingly available and economically viable, which in the future may result in these units continuing to be stable, economically and environmentally viable generators, operating as the base load of the energy system, and allowing for its transformation towards gas and renewable sources.

The expected lifetime of lignite-fired units, new deposits that it is planned to exploit and high level of public opposition to the associated impact on the environment appear to make it necessary to undertake environmental optimisation of lignite mining and its combustion for energy purposes. While in the case of power plants, we are mainly talking about flue gas purification plants, i.e. CSS, deNO_x, deSO_x, mercury removal, in the case of mining and its direct and indirect impact it is necessary to look at the whole process (from the moment of fuel extraction through its transport, processing and use). Identifying in this way all the processes in the chain of supply and production that contribute most to the degradation of the environment could permit the finding of a technological solution for their modernisation or optimisation. This will therefore make it possible to limit the impact of the entire process (the complete chain of supply and production), and not only the node related with energy production and flue gas purification. In this way, the large lignite-fired units envisaged for the country's energy transformation may play an important role in years to come, ensuring the country's energy security and the stability of the electricity supply network, as well as being operated more sustainably and being decommissioned in due course.

Such a holistic approach is possible with the use of environmental impact assessment methods such as LCA (Life Cycle Assessment). It permits the identification of the environmental weaknesses of the system, for which it is then possible to propose technological solutions designed to reduce this impact. Taking into account that lignite in Poland is still an important source in the national energy system, and the full transformation of the sector towards the exclusion of coal sources may take several decades, the article focuses on the analysis of the lignite mining process and the impact of the quality of the fuel produced on potential emissions from the processes of energy transformation based on it. The analysis covers the whole life cycle of the product and identifies the hot spots in order to propose technological solutions limiting the environmental impacts of the process being analysed.

4 Life Cycle Assessment

4.1 Methodology

The environmental impact analysis was carried out using a model combining LCA life cycle assessment, taking into account the principles described in ISO 14040 and 14044, fossil fuel extraction processes with qualitative parameters of the coal produced and emissions of SO_x, NO_x and dust from their combustion processes [20]. The analysis, however, takes into account all phases of the lignite mining and fuel production process (adjusted qualitatively to the current constraints imposed on power plants and other alternative solutions) without taking into account their combustion in the power plant. In the analysis, an attributional analysis (aLCA) approach was used, where the system reflects in detail all areas of activity of the plant being analysed which are carried out in a given place and time (status quo). In such a situation, the allocation approach is applied using physical (mass factor) dependencies. In this way, the environmental impact of the system under analysis on equivalent products is separated out. The LCIA of the mining plant being surveyed was performed using the SimaPro Developer 8.5.0 software and the ILCD 2011 midpoint v.1.05 method.

4.2 LCI (Life Cycle Inventory)

Inventory data from one of the Polish lignite mines were used for the analysis. The inventory data refers to the annual production portfolio and includes two main elements: input data (streams of materials, energy and fuels entering the process) and output data (streams of materials, energy and fuels coming out of the process). Data were obtained on the basis of the preparation of a questionnaire concerning the mining operations and on the basis of an individual interview. Information related to environmental fees for emissions and for waste generated was also used. The completeness of the data was checked by means of mass-energy balancing at the level of the plant, in accordance with PN-EN ISO 14040:2009, PN-EN ISO 14040:2009. The results obtained showed differences (%) between the input and output data of 0.5%. Life cycle data used in the supply chain of consumables, fuels or process steam for the mines were selected from Ecoinvent v3.0 databases and are mostly data representative of the situation at the European level. Data based on the national energy mix were only used for analysis of the electricity used. The analysis omitted the mine's infrastructure and works related to it and preparatory works (making the deposit available). The functional unit adopted for the analysis was the annual production of fuels included in the portfolio, and for comparison purposes auxiliary units were also used in the form of Mg of coal produced and GJ of energy obtained from the coal that was produced. Inventory data are presented in Table 1.

In 2015, a total of 42,081 thousand tonnes of lignite was produced in the mine

analysed (extraction and processing). The total cumulative environmental impact, resulting from the annual operation of the mine is 302 kPt (Table 2). The values obtained for the potential environmental impact of the annual production are consistent with the results of the indicator analysis presented in Table 3.

Converted to a rate per GJ of fuel produced, the ratio of 0.89 mPt/GJ is mainly related to the need to remove large amounts of overburden. Land use and electricity consumption are the key factors producing an environmental impact in this case. Analysing the results obtained, several key aspects of modelling were distinguished, i.e:

- calorific value - results from the functional equivalence of coal of different calorific values adopted in accordance with the LCA methodology; the results were not only converted into rates per Mg of coal extracted, but also into rates per GJ of energy,
- the volume of electricity consumption coming from the Polish power grid,
- the quantity of overburden and waste and manner of its management.

The structure of the environmental impact expressed in percentages of individual impact categories is presented in Table 4.

4.3 Discussion

The category of water eutrophication - fresh water, which accounts for 60.23% of the total impact, is dominant for the plant examined. The category results from the removal of overburden and its moving to internal or external dumping sites, which in consequence causes contamination of groundwater by, among other processes, washing out compounds such as sulphur and other chemicals by precipitation. It should be noted here that the LCA analysis does not show time- and locality- specific environmental effects. Modelling of the environmental impact consists in the use of a general cause and effect relationship between a given type of emission or its retrieval from the environment and the type of impact. The basis for this is the use of known and scientifically confirmed relationships in the environmental mechanism. In these models, the environmental impact is assessed taking into account averaged conditions from a European model and assuming averaged values of parameters such as population density, land area and water area, temperature, precipitation, ecosystem quality and structure, background concentrations, etc. Thus, the LCA results do not have the capacity to show local effects, as they are "fuzzy" due to reference to the conditions based on a continental average. The overburden management impact accounts for 61.9% of the mine's overall cumulative impact rate and the electricity consumed for another 37.1%.

For the cumulative weighted results of the environmental impact, the following categories should be considered the most important: human health - non-carcinogens, human health - carcinogens, resource depletion - water resources, water eutrophication - fresh water.

Figure 1 and Table 5 present the results of the assessment of what are known as the main environmental impact hot spots, based on weighted impact indicators. According to the results obtained, it can be seen that the demand for electricity, converted into a rate per GJ of coal produced during the year and totalling 3.354 kWh/GJ, is responsible for 37.8% of the total impact. The low share of electricity consumption results from the high share of overburden management in the total indicator (61.9% of the total cumulative impact index for this mine). Overall, it can be concluded that the above processes are the main hot spots for the plant examined. In order to determine the unit processes which, apart from the ones mentioned above, are seen to contribute a significant share of the environmental impact, the results were presented excluding the use of electricity and the necessity to remove the overburden in the next stage of the analysis. Within the framework of the hot spots analysis, and excluding the share of electricity and overburden, the activities of the mine were divided into the following sub-systems:

- direct activities (elementary streams) - streams taken directly from the environment (mine waters, mineral resources, land occupancy or transformation), direct emissions to air, water, soil,
- processes in the technosphere - material/raw material or energy used in individual technological processes (e.g. explosives, steel, diesel, etc.)

The results of the analysis are presented in Fig. 2 and in a more detailed form in Tables 6. If the processes associated with electricity use and the management of the large quantities of overburden are excluded, the calculated impact for its annual operations is reduced to 3.03 kPt, of which 65% is the effect of direct activities. For the plant, a few inventory elements were identified which were considered to be of key importance - coal depletion, water depletion and land use. From the point of view of mining activity, these are typical impacts of a mine on the environment, the dominant impact (67.79%) being related to the impact category of mineral, fossil resources (Fig. 2). Furthermore, the land use impact category also has a high share, which is related to the large-scale transformation of the land surface (opencast operations). The recovery of degraded land, which is planned after the closure of the mine, contributes to significant environmental benefits in this category, as shown in Figure 2 below the X axis and in Table 6 with a negative sign.

Another environmental aspect responsible for a direct impact is associated with the large quantities of mine water pumped out of the mine and its use in technological processes (13.25% impact). Figure 2 presents the impact of other technological processes affecting the environment. Apart from the direct impact, a significant impact is related to the use of diesel, explosives and heat. These impacts include 16.34% (0.495 kPt), 31.76% (0.961 kPt) and 42.19% (1.277 kPt) of the total indicator. Diesel is mainly burned by trucks transporting part of the overburden and spoil. However, most of the coal extracted and overburden removed is excavated by multi-vessel excavators and transported by electric-powered conveyor belts.

5 Conclusions

There is no literature on modelling the impact of mining processes based on the LCA methodology that takes into account the quality of the fuel obtained. The available items underline some methodological inconsistencies, which may be the reason for the small number of LCA studies undertaken in the mining industry. These include, among other issues, problems with the selection of an appropriate functional unit, the limits of the system analysed or the determination of the weight of particular impact categories reflecting the significant environmental problems in mining. In addition, there is a lack of detailed data consistent with the quality requirements of the LCA methodology on the basis of which it would be possible to conduct comparative analyses between individual mining enterprises. The environmental impact of a mine depends to a large extent on the geological and deposit conditions, the thickness of the deposit, its depth, etc. These aspects determine, for example, the amount of overburden to be removed or the depth of the shaft and the length of galleries to be prepared. Such conditions have a significant impact on the LCA results. Analysing the results obtained, several key (hot spot) elements of the lignite mining operations were distinguished for modelling the environmental impact, i.e.: calorific value - results from the functional equivalence of coal of different calorific values adopted in accordance with the LCA methodology; the results were converted not only per Mg of coal extracted, but also per GJ of energy, the amount of electricity consumption - coming from the Polish power grid, the manner in which waste is managed and its amount. As a result there is a high sensitivity of the final indicator to changes in these impacts. In general, it can be stated that electricity consumption and the need to manage the overburden are the main hot spots for the study plant. As part of the hot spot analysis, excluding the share of electricity and overburden, most of the environmental impact was generated by direct impact. The process defined as direct impact includes the basic (elementary) streams themselves. Several inventory elements were identified which were considered to be of key importance - coal depletion, water depletion and land use. From the point of view of mining activity, these are typical impacts of a mine on the environment [30]. Generally, the results obtained in the study allowed the unit processes in the life cycle of the fossil fuel extraction processes which contribute the largest share in the overall environmental impact to be identified and prioritised. Due to the fact that the study focused mainly on the fossil fuel extraction phase, the hot spots identified concern only this stage of the electricity production life cycle in Poland. Their prioritisation and analysis in terms of alternative technological solutions may be the basis for the introduction of organisational and technical changes aimed at maintaining the optimum quality of the environment of these processes.

Conflict of interest

The authors declare that they have no conflict of interest.

Table 1 Inventory data for LCA

NAME	QUANTITY	UNIT	SOURCES
Inputs - tehcnosphere flows			
Electricity	1 136 340 398.00	kWh	A
Heat energy	223 476.00	GJ	A
Steam	31 153.00	GJ	A
Gasoline	32.38	Mg	B
Diesel	6103.71	Mg	B
Fuel oil	541.08	Mg	B
Grease and chemicals	34.97	Mg	A
Explosives	1 243 793.00	kg	A
Ring-directional charges	253.00	items	A (0.250 kg/item.)
TNT Booster stimulators	16.00	items	A (0.021 kg/item)
Detonators	36 743.00	items	A (0.08 kg/item.)
Drinking water	332 954.00	m3	A
Inputs - elementary flows			
Lignite	42 081 000.00	Mg	A
Accompanying fossils	171 205.26	Mg	A
Overburden	119 734 000.00	m3	D
Area occupied	8566.00	ha	A
Mine water	233 689 531.00	m3	A
Outputs - technosphere flows			
Sewage	42 040.00	m3	A
Industrial wastewater	2 401 964.00	m3	A
Other wastes	43 604.25	Mg	A
Lignite (unsorted 0-300 mm)	41 996 838.00	Mg	A
Lignite (0-40 mm)	84162.00	Mg	A
Granite	1856.33	Mg	A
Quartzite	64 951.79	Mg	A
Sand and gravel	19 786.20	Mg	A
Lime	77 793.74	Mg	A
Peat	2371.20	Mg	A
Humus	4446.00	Mg	A
Overburden removed	119 734 000.00	m3	A
Outputs - elementary flows			
Mine water discharged	233 455 635.27	m3	A
Sewage slurry	233 689 531.00	kg	A
Total dust	0.497	Mg	A
Carbon monoxide	0.116	Mg	A
Nitrogen oxides	1.756	Mg	A
Carbon dioxide	1411.98	Mg	A
Aliphatic alcohols	0.507	Mg	A
Aliphatic hydrocarbons	4.518	Mg	A

[A] Information (qualitative or quantitative) comes directly from the mine in question included in the analyses without recalculation or transformation,

[B] Information (qualitative or quantitative) based on various indicators, but derived entirely from documents and/or information obtained from the mine,

[C] Information (qualitative or quantitative) based on data from the Marshal's Office concerning the amount of pollutants introduced into the environment,

[D] Information (qualitative or quantitative) based entirely on data from secondary sources (e.g. scientific articles, CSR reports).

Table 2 Production volumes and potential environmental impact of annual mine operations in 2015.

	UNIT	QUANTITY
Lignite production 2015	Mg	41 996 838
Environmental impact on annual production in 2015.	kPt	302.00
Environmental impact per Mg of lignite	mPt/Mg	7.18
Environmental impact per GJ of lignite	mPt/GJ	0.89

Table 3 Indicators of the specific consumption of selected materials, energy and fuels per Mg of fuel produced for the mine examined

Electricity consumption	kWh/Mg	27.0
Amount of mine water discharged	m ³ /Mg	5.54
Mining area	m ² /Mg	1.44
Amount of diesel	kg/Mg	0.15
Emissions of CO ₂	kg/Mg	0.46*

* due to lack of actual data, the value is calculated indicatively

Table 4 Weighted results of the impact category indicators of annual mine production (2015) both per tonne and per GJ of coal [Pt, %]

Impact categories	Impact on annual production	
	kPt	%
Climate change	8,21	2,72
Ozone depletion	0,05	0,02
Human toxicity, non-cancer effects	20,40	6,75
Human toxicity, cancer effects	23,67	7,83
Particulate matter	7,83	2,59
Ionising radiation	0,64	0,21
Photochemical ozone formation	4,95	1,64
Acidification	11,23	3,71
Terrestrial eutrophication	3,22	1,06
Freshwater eutrophication	182,07	60,23
Marine eutrophication	3,30	1,09
Freshwater ecotoxicity	5,11	1,69
Land use	-1,36	-0,45
Water resource depletion	29,66	9,81
Mineral, fossil & renewable resource depletion	3,31	1,09
TOTAL	302,29	100,00

Impact per tonne of coal [mPt]	
Climate change	0,20
Ozone depletion	0,00
Human toxicity, non-cancer effects	0,48
Human toxicity, cancer effects	0,56
Particulate matter	0,19
Ionising radiation	0,02
Photochemical ozone formation	0,12
Acidification	0,27
Terrestrial eutrophication	0,08
Freshwater eutrophication	4,33
Marine eutrophication	0,08
Freshwater ecotoxicity	0,12
Land use	-0,03
Water resource depletion	0,70
Mineral, fossil & renewable resource depletion	0,08
TOTAL	7,18

Impact GJ of coal [mPt]	
Climate change	0,02
Ozone depletion	0,00
Human toxicity, non-cancer effects	0,06
Human toxicity, cancer effects	0,07
Particulate matter	0,02
Ionising radiation	0,00
Photochemical ozone formation	0,01
Acidification	0,03
Terrestrial eutrophication	0,01
Freshwater eutrophication	0,54
Marine eutrophication	0,01
Freshwater ecotoxicity	0,02
Land use	0,00
Water resource depletion	0,09
Mineral, fossil & renewable resource depletion	0,01
TOTAL	0,89

Table 5 Add caption

IMPACT CATEGORY	UNIT PROCESSES [kPt]														
		DIRECT IMPACT	PETROL	DIESEL	HEATING OIL	GREASE AND LUBRICATING CHEMICALS	EXPLOSIVES	DRINKING WATER	ELECTRICITY	HEAT	STEAM	WASTEWATER	OVERBURDEN	OTHER WASTE	
	kPt	302.29	-0.05	0.00	0.49	0.04	0.01	0.96	0.10	112.09	1.28	0.12	-0.002	187.17	0.07
	%	100	-0.02	0.00	0.16	0.01	0.00	0.32	0.03	37.08	0.42	0.04	-0.001	61.92	0.02
Climate change		0.010	0.0002	0.023	0.002	0.0003	0.050	0.002	7.999	0.095	0.023	0.0001	0	0.003	
Ozone depletion		0	0.0001	0.013	0.001	0.0001	0.001	0.00004	0.030	0.0001	0.001	0.000002	0	0.0004	
Human toxicity, non-cancer effects		0	0.0002	0.032	0.003	0.001	0.094	0.008	18.622	0.258	0.015	0.0003	1.367	0.004	
Human toxicity, cancer effects		0	0.0004	0.051	0.004	0.001	0.246	0.025	16.034	0.239	0.012	0.0016	7.045	0.013	
Particulate matter		0.0002	0.0004	0.055	0.004	0.001	0.084	0.004	7.558	0.099	0.018	0.0002	0	0.009	
Ionising radiation		0	0.0005	0.085	0.007	0.001	0.007	0.001	0.526	0.002	0.004	0.00002	0	0.003	
Photochemical ozone formation		0.004	0.0003	0.040	0.003	0.002	0.037	0.001	4.796	0.050	0.009	0.0001	0	0.009	
Acidification		0.002	0.0004	0.055	0.005	0.0005	0.060	0.002	10.943	0.140	0.014	0.0001	0	0.006	
Terrestrial eutrophication		0.003	0.0001	0.017	0.001	0.0002	0.041	0.001	3.111	0.029	0.005	0.0001	0	0.005	
Freshwater eutrophication		0	0.00002	0.003	0.0003	0.0001	0.015	0.001	6.480	0.160	0.001	0.0000	175.408	0.001	
Marine eutrophication		0.003	0.0001	0.016	0.001	0.0002	0.027	0.001	2.845	0.028	0.005	0.0001	0.370	0.005	
Freshwater ecotoxicity		0	0.0001	0.019	0.002	0.0002	0.039	0.002	2.039	0.028	0.003	0.0001	2.980	0.002	
Land use		-2.020	0.0003	0.050	0.004	0.00027	0.007	0.0002	0.592	-0.000005	0.002	0.0001	0	0.006	
Water resource depletion		0.215	0.00003	0.004	0.0004	0.0001	-0.003	0.043	29.262	0.144	0.001	-0.005	0	0.001	
Mineral, fossil & renewable resource depletion		1.731	0.0003	0.031	0.002	0.006	0.257	0.010	1.257	0.004	0.003	0.0005	0	0.008	

Table 6 Weighted results of the analysis (without the use of electricity and the need to remove overburden) and the share of particular impact categories and unit processes in the overall impact indicator

UNIT PROCESSES		DIRECT IMPACT	PETROL	DIESEL	HEATING OIL	GREASES AND LUBRICATING CHEMICALS	EXPLOSIVES	DRINKING WATER	ELECTRICITY	HEAT	STEAM	WASTEWATER	
	textbfkPt	3.03	-0.05	0.003	0.49	0.04	0.01	0.96	0.1	1.28	0.12	-0.002	0.07
	%	100	-1.77	0.11	16.34	1.36	0.4	31.76	3.31	42.19	3.9	-0.06	2.45
IMPACT CATEGORY	SHARE OF INDIVIDUAL IMPACT CATEGORIES AS A RESULT OF THE INDICATOR FOR A GIVEN UNIT PROCESS (%)												
Climate change	6.91	19.02	5.5	4.71	4.4	2.69	5.18	1.73	7.47	19.48	6.07	4.5	
Ozone depletion	0.55	0	2.08	2.61	2.72	0.58	0.11	0.04	0.01	0.88	0.13	0.49	
Human toxicity, non-cancer effects	13.7	0	6.87	6.39	6.36	5.39	9.77	7.7	20.24	12.81	16.48	5.42	
Human toxicity, cancer effects	19.6	0	10.53	10.33	10.82	8.44	25.59	25.2	18.71	10.08	90.9	16.95	
Particulate matter	9.06	0.45	12.68	11.14	10.41	4.89	8.71	4.03	7.75	15.38	10.96	11.47	
Ionising radiation	3.62	0	13.81	17.2	17.99	4.18	0.76	0.55	0.12	3.47	1.11	3.46	
Photochemical ozone formation	5.14	6.9	7.86	8.14	8.32	15.88	3.82	1.39	3.9	8.03	5.44	11.61	
Acidification	9.36	3.41	11.14	11.11	11.12	3.9	6.21	1.84	10.97	11.48	4.94	7.68	
Terrestrial eutrophication	3.43	5.28	3.43	3.45	3.51	1.45	4.27	0.87	2.3	4.61	3.21	7.37	
Freshwater eutrophication	5.99	0	0.71	0.57	0.62	1.11	1.59	0.59	12.54	1.22	1.9	0.7	
Marine eutrophication	2.88	5.02	3.22	3.26	3.3	1.32	2.84	0.81	2.21	4.31	2.95	6.97	
Freshwater ecotoxicity	3.14	0	3.76	3.83	3.9	1.74	4.09	1.68	2.17	2.93	6.68	2.7	
Land use	-64.43	-3763.21	8.17	10.17	10.56	2.24	0.69	0.21	0	1.75	3	8.47	
Water resource depletion	13.25	399.66	0.86	0.89	0.96	0.49	-0.36	43.25	11.3	0.98	-280.17	1.82	
Mineral, fossil & ren resource depletion	67.79	3223.48	9.38	6.19	5	45.69	26.73	10.1	0.33	2.56	26.4	10.4	
TOTAL	100.00%	100.0%	100.0%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	

Table 7 Add caption

Impact Category	Unit	Impact on annual production
Climate change	kg CO2 eq	1.14E+09
Ozone depletion	kg CFC-11 eq	15.19762
Human toxicity, non-cancer effects	CTUh	163.122
Human toxicity, cancer effects	CTUh	13.10185
Particulate matter	kg PM2.5 eq	446396.9
Ionising radiation	kBq U235 eq	10770839
Photochemical ozone formation	kg NMVOC eq	2354178
Acidification	molc H+ eq	7964854
Terrestrial eutrophication	molc N eq	8487608
Freshwater eutrophication	kg P eq	4041731
Marine eutrophication	kg N eq	836874.5
Freshwater ecotoxicity	CTUe	6.70E+08
Land use	kg C deficit	-1.52E+09
Water resource depletion	m3 water eq	36216964
Mineral, fossil & ren resource depletion	kg Sb eq	5012.929

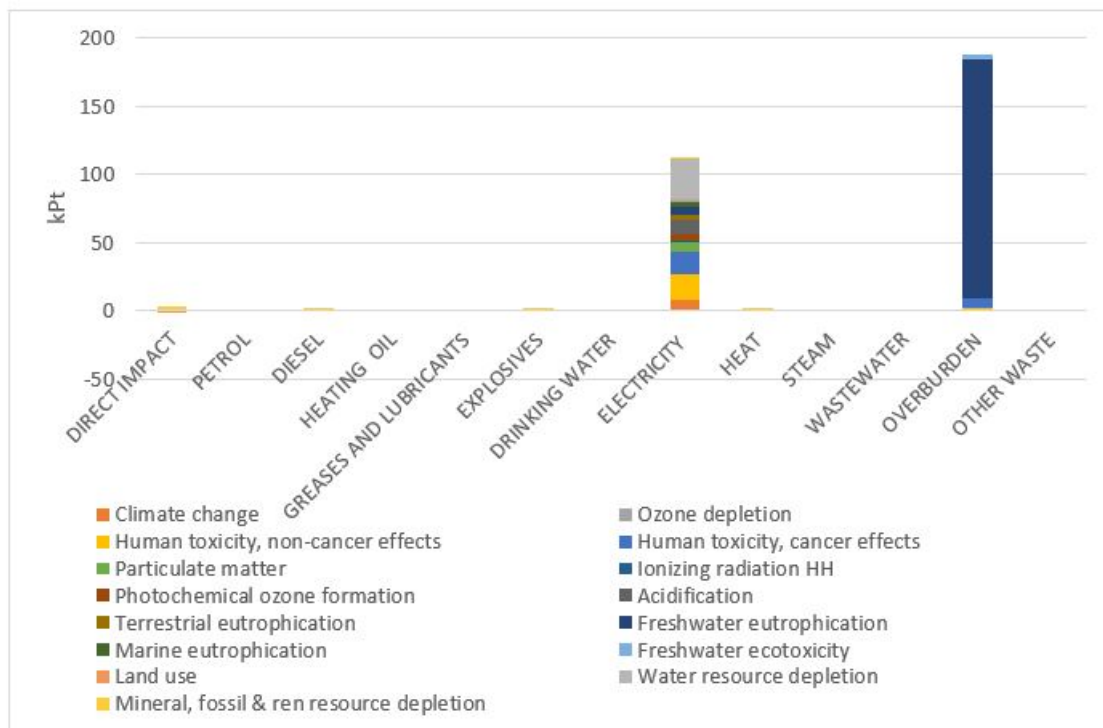


Fig. 1 Weighted analysis results

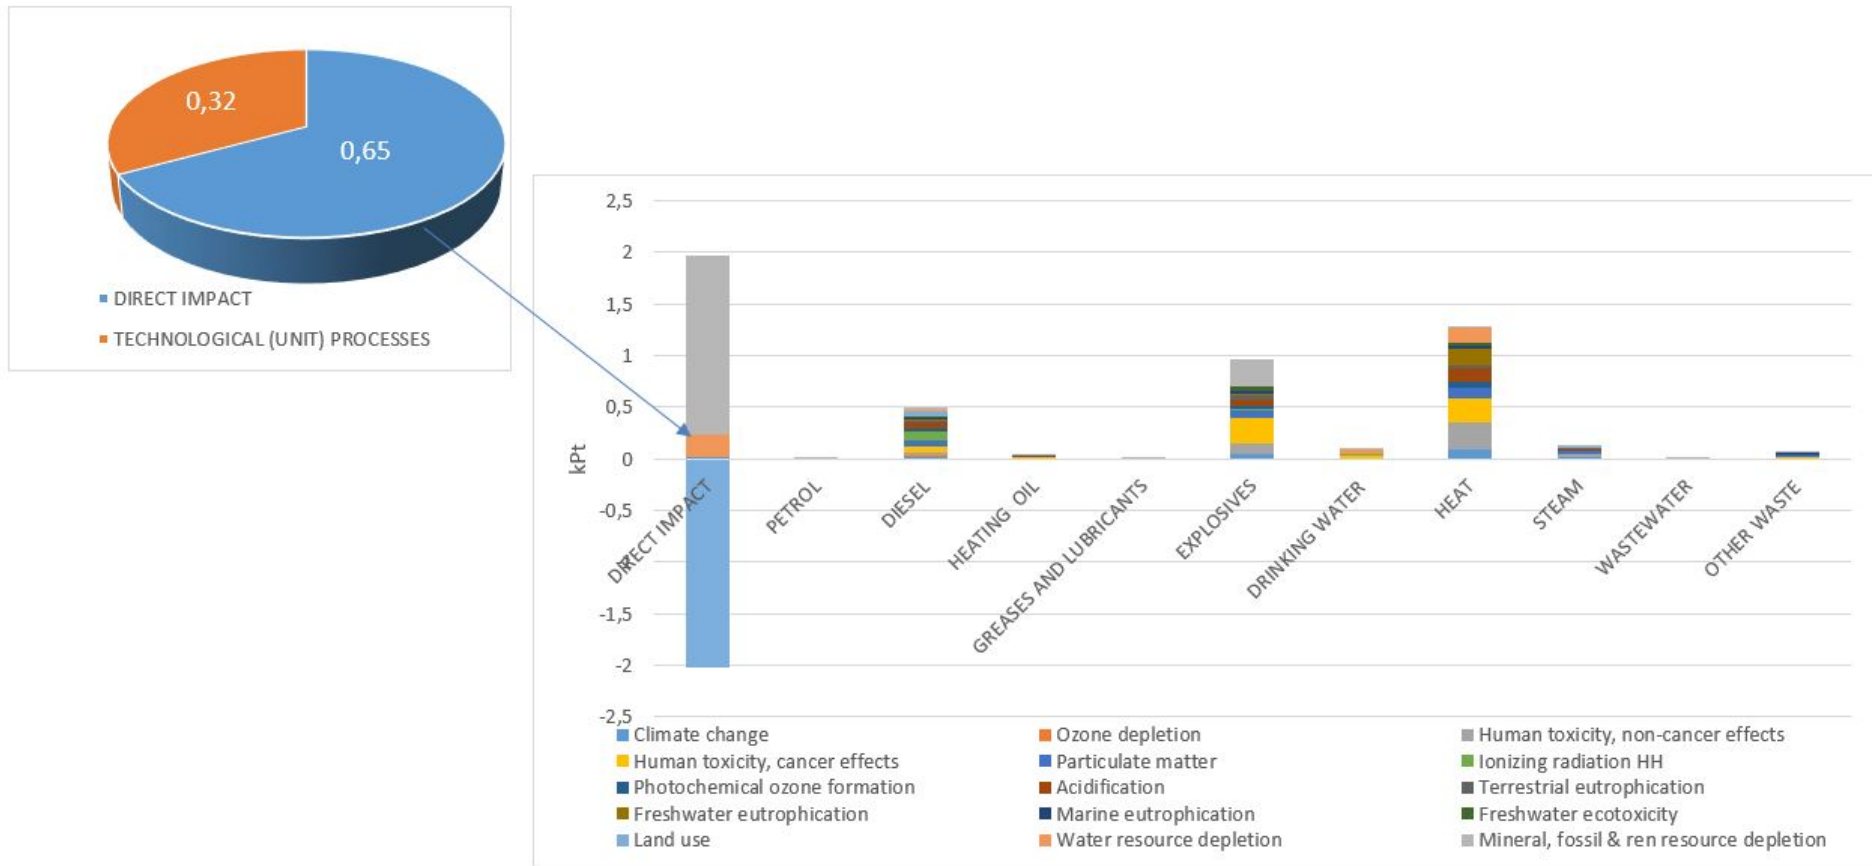


Fig. 2 Weighted results of the analysis (without the use of electricity and the need to remove overburden)

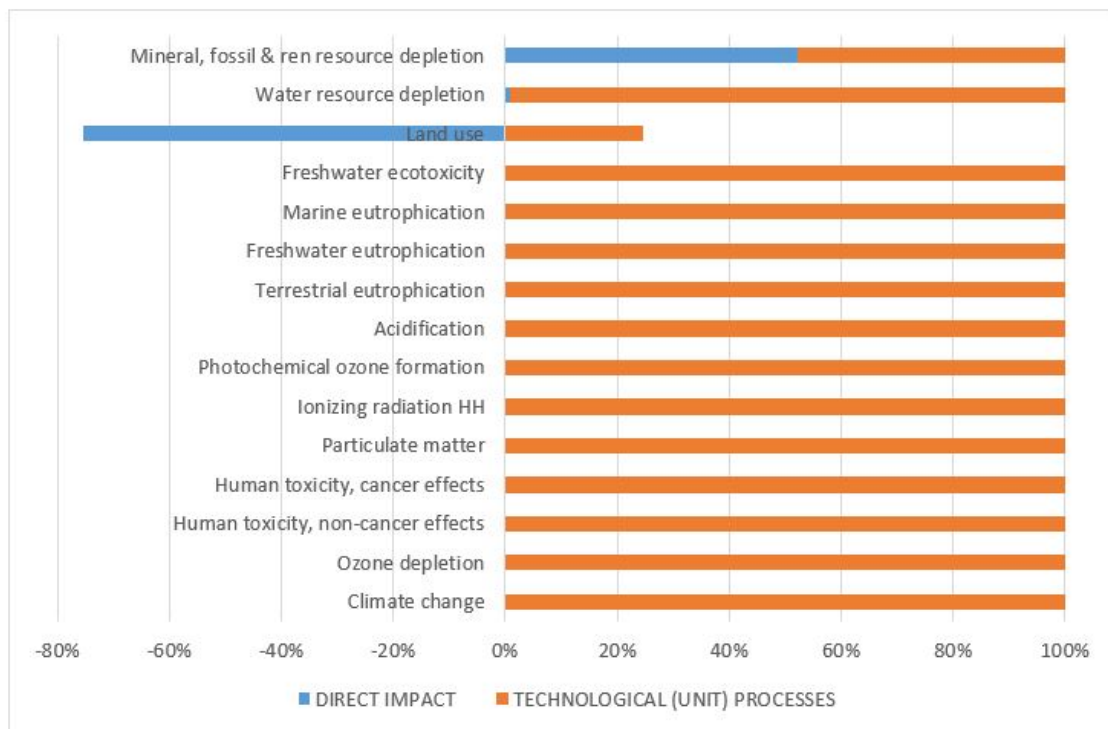


Fig. 3 Shares of direct impact and other technological processes - after the characterisation stage [%]

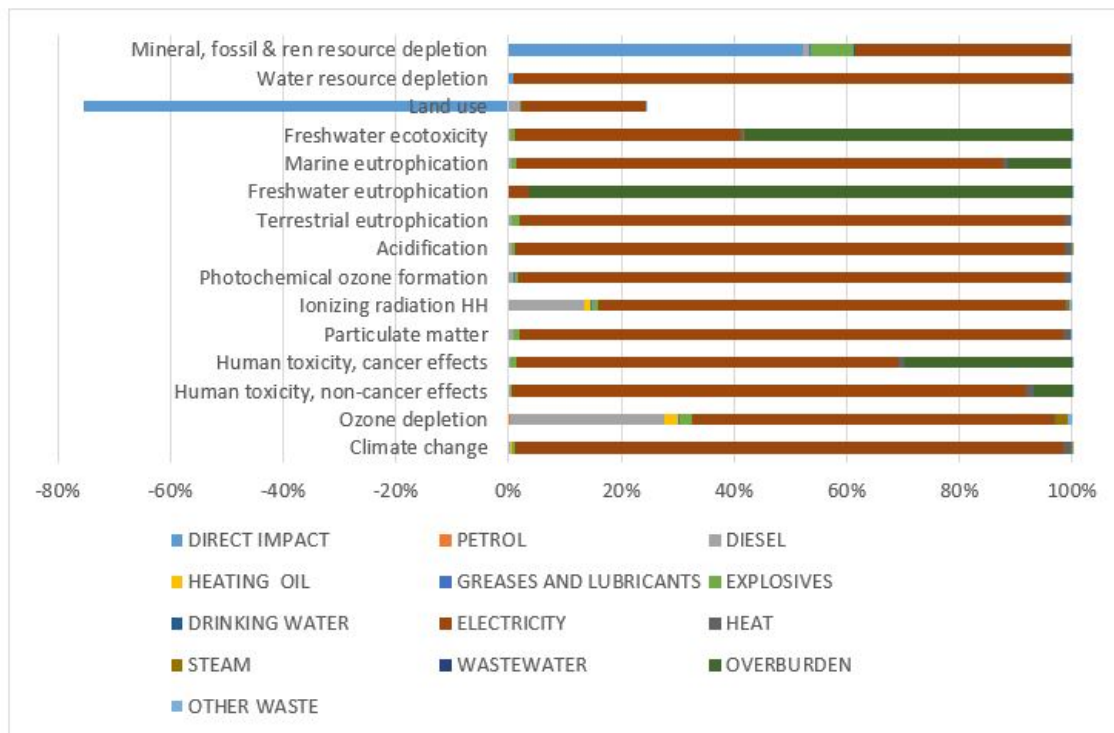


Fig. 4 Shares of unit processes - after the characterisation stage [%]

References

1. Aguirre-Villegas HA, Benson CH (2017) Case history of environmental impacts of an Indonesian coal supply chain. *J Clean Prod* 157:47-56. <https://doi.org/10.1016/j.jclepro.2017.03.232>
2. Awuah-Offei K, Adekedjou A (2011) Application of life cycle assessment in the mining industry. *Int J Life Cycle* 16:82 – 89. <https://doi.org/10.1007/s11367-010-0246-6>
3. Barbosa Reis Monteiro N, Aparecida da Silva E, Machado Moita Neto J (2019) Sustainable development goals in mining. *J Clean Prod* 228:509-520. <https://doi.org/10.1016/j.jclepro.2019.04.332>
4. Bednorz J (2011) Społeczno-ekologiczne skutki eksploatacji węgla kamiennego w Polsce. *Górnictwo i Geologia*. <https://www.polsl.pl/Wydzialy/RG/Wydawnictwa/Documents/kwartal/6.4.1.pdf>. Accessed 29 August 2020
5. Burchart-Korol D, Fugiel A, Czaplicka-Kolarz K, Turek M (2016) Model of environmental life cycle assessment for coal mining operations. *Sci Total Environ*. doi:10.1016/j.scitotenv.2016.03.202
6. Coal Information (2019). International Energy Agency. <https://www.iea.org/reports/coal-information-overview>. Accessed 29 August 2020
7. Coal Regions in Transition Platform (2017). https://ec.europa.eu/energy/events/conference-coal-regions-transition-platform_en?redir=1. Accessed 29 August 2020
8. Ditsele O, Awuah-Offei K (2012) Effect of mine characteristics on life cycle impacts of US surface coal mining. *Int J Life Cycle* 17:287 – 294. <https://doi.org/10.1007/s11367-011-0354-y>
9. Drielsma JA, Russell-Vaccari AJ, Drnek T, Brady T, Weihed P, Mistry M, Perez Simbor L (2016) Mineral resources in life cycle impact assessment—Defining the path forward. *Int. J Life Cycle Assess* 21:85–105. <http://dx.doi.org/10.1007/s11367-015-1006-4>.
10. Durucan S, Korre A, Munoz-Melendez G (2006) Mining life cycle modelling: A cradle-to-gate approach to environmental management in the minerals industry. *J Clean Prod* 14:1057–1070. <https://doi.org/10.1016/j.jclepro.2004.12.021>
11. Endl A, Tost M, Hitch M, Moser P, Feiel S (2019) Europe’s mining innovation trends and their contribution to the sustainable development goals: Blind spots and strong points. *Resources Policy*. <https://doi.org/10.1016/j.resourpol.2019.101440>
12. European Parliament resolution of 14 March 2019 on climate change – a European strategic long-term vision for a prosperous, modern, competitive and climate neutral economy in accordance with the Paris Agreement (2019/2582(RSP)). https://www.europarl.europa.eu/doceo/document/TA-8-2019-0217_EN.htm. Accessed 29 August 2020
13. European Union (2020) Energy Policy Review. International Energy Agency. <https://www.iea.org/reports/european-union-2020>. Accessed 29 August 2020
14. Ghadimi P, Wang C, Hossein Azadnia A, Lim MK, Sutherland JW (2019) Life cycle-based environmental performance indicator for the coal-to-energy supply chain: A Chinese case application. *Resources Conservation and Recycling* 147:28-38. <https://doi.org/10.1016/j.resconrec.2019.04.021>
15. Guimarães da Silva M, Costa Muniz AR, Hoffmann R, Luz Lisbó AC (2018) Impact of greenhouse gases on surface coal mining in Brazil. *J Clean Prod* 193:206-216. <https://doi.org/10.1016/j.jclepro.2018.05.076>
16. JRC Science for Policy Report (2017) Best Available Techniques (BAT) Reference Document for Large Combustion Plants. European Commission. <https://ec.europa.eu/jrc/en/publication/eur-scientific-and-technical-research-reports/best-available-techniques-bat-reference-document-large-combustion-plants-industrial>. Accessed 29 August 2020
17. Ju Y, Zhu Y, Xie H, Nie X, Zhang Y, Lu C, Gao F (2009) Fluidized mining and in-situ transformation of deep underground coal resources: a novel approach to ensuring safe, environmentally friendly, low-carbon, and clean utilisation. *Int J Coal Sci Technol* 6:184–196. <https://doi.org/10.1007/s40789-019-0258-1>

18. Klinglmair M, Sala S, Brandao M (2014) Assessing resource depletion in LCA: A review of methods and methodological issues. *Int J Life Cycle Assess* 19:580–592. <https://doi.org/10.1007/s11367-013-0650-9>
19. Kopacz M, Kryzia D, Kryzia K (2017) Assessment of sustainable development of hard coal mining industry in Poland with use of bootstrap sampling and copula-based Monte Carlo simulation. *J Clean Prod* 159(15):359–373. <https://doi.org/10.1016/j.jclepro.2017.05.038>
20. Lelek L, Kulczycka J (2020) Life Cycle Modelling of the Impact of Coal Quality on Emissions from Energy Generation. *Energies*13(6): 1–11. <https://doi.org/10.3390/en13061515>
21. Mangena SJ, Brent AC (2016) Application of a Life Cycle Impact Assessment framework to evaluate and compare environmental performances with economic values of supplied coal products. *J Clean Prod* 14:1071–1084. <https://doi.org/10.1016/j.jclepro.2004.04.012>
22. Segura-Salazar J, Mariano Lima F, Marcelo Tavares L (2019) Life Cycle Assessment in the minerals industry: Current practice, harmonization efforts, and potential improvement through the integration with process simulation. *J Clean Prod* 232:174–192. <https://doi.org/10.1016/j.jclepro.2019.05.318>
23. Sengül H, Bayrak F, Köksal M, Ünver B (2016) A cradle to gate life cycle assessment of Turkish lignite used for electricity generation with site-specific data. *J Clean Prod* 129:478–490. <https://doi.org/10.1016/j.jclepro.2016.04.025>
24. Singh U, Sharma N, Mahapatra SS (2016) Environmental life cycle assessment of Indian coal-fired power plants. *Int J Coal Sci Technol* 3(2):215–225. <https://doi.org/10.1007/s40789-016-0136-z>
25. Submission by Croatia and the European Commission on behalf of the European Union and its Member States (2020). Subject: Long-term low greenhouse gas emission develop. <https://unfccc.int/sites/default/files/resource/HR-03-06-2020%20EU%20Submission%20on%20Long%20term%20strategy.pdf>. Accessed 29 August 2020
26. Sustainable production and consumption. <https://ec.europa.eu/jrc/en/research-topic/sustainable-production-and-consumption>. Accessed 29 August 2020
27. Wang C, Mu D (2014) An LCA study of an electricity coal supply chain. *J Ind Eng Manag* 7(1):311–335. <https://www.jiem.org/index.php/jiem/article/view/1053>
28. World Energy Outlook (2019). International Energy Agency. <https://www.iea.org/reports/world-energy-outlook-2019>. Accessed 29 August 2020
29. Xu J (2013) Research on carbon emissions measurement of coal-energy chain based on life-cycle assessment method. *Appl Mech Mater* 367:333–338. <https://doi.org/10.4028/www.scientific.net/AMM.367.333>
30. Yu S, Yi-M W, Guo H, Ding L (2014) Carbon emission coefficient measurement of the coal-to-power energy chain in China. *Appl Energy* 114:290–300. <https://doi.org/10.1016/j.apenergy.2013.09.062>

Figures

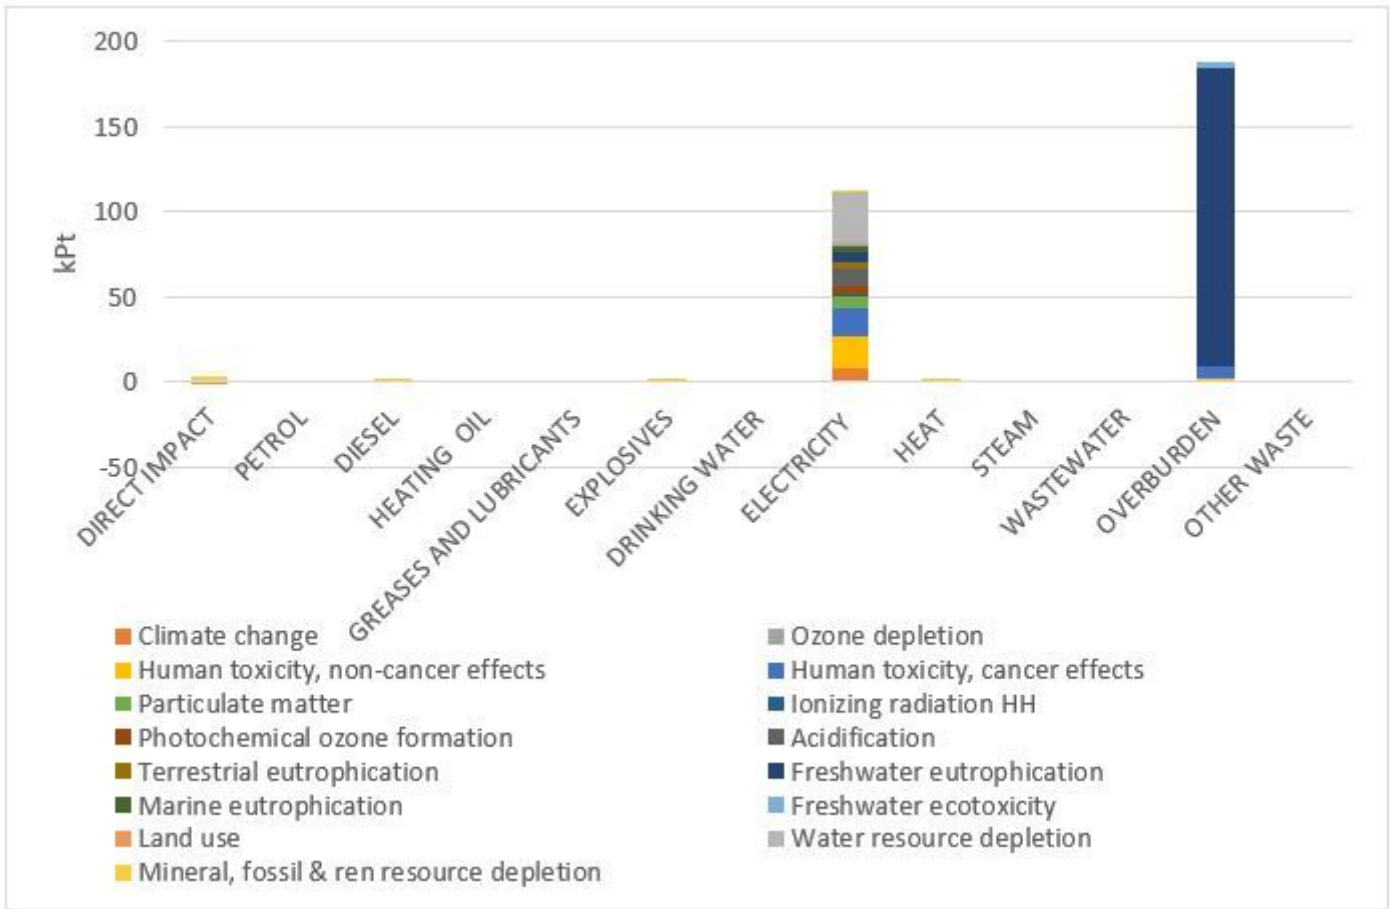


Figure 1

Weighted analysis results

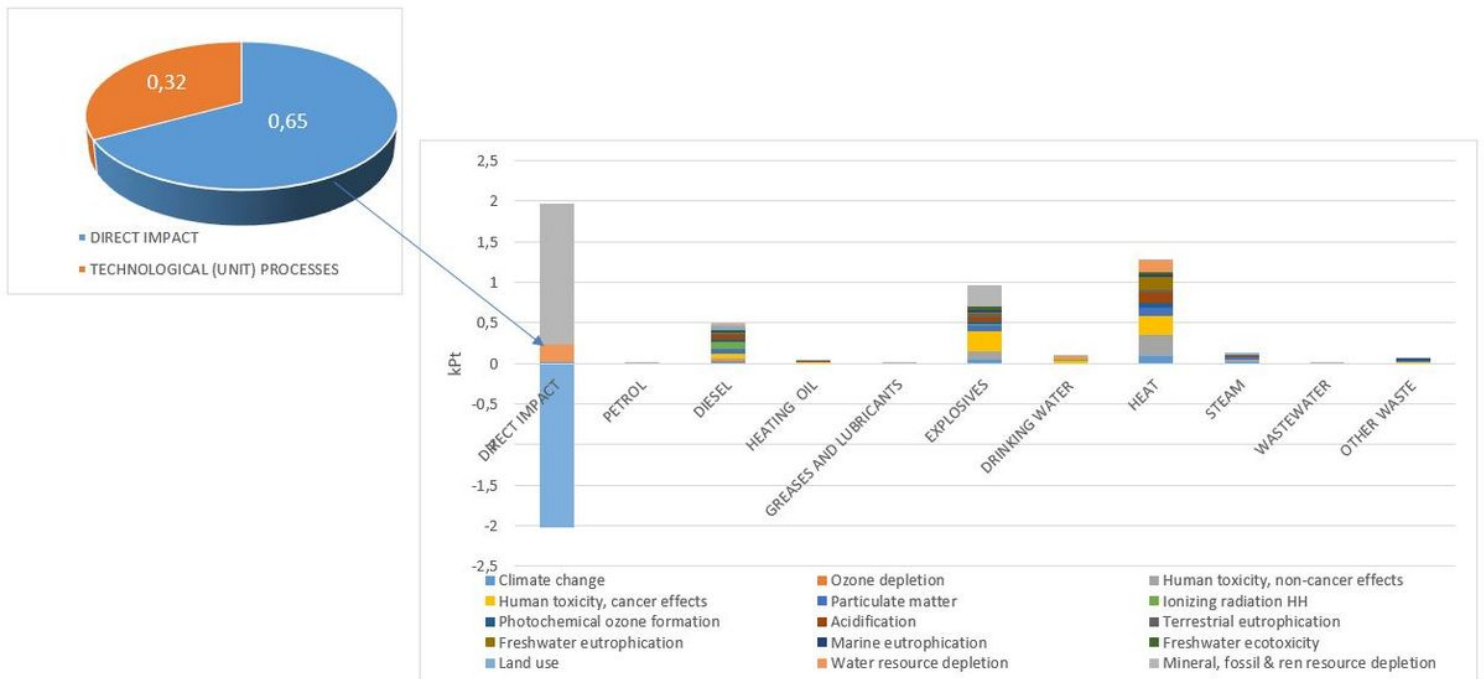


Figure 2

Weighted results of the analysis (without the use of electricity and the need to remove overburden)

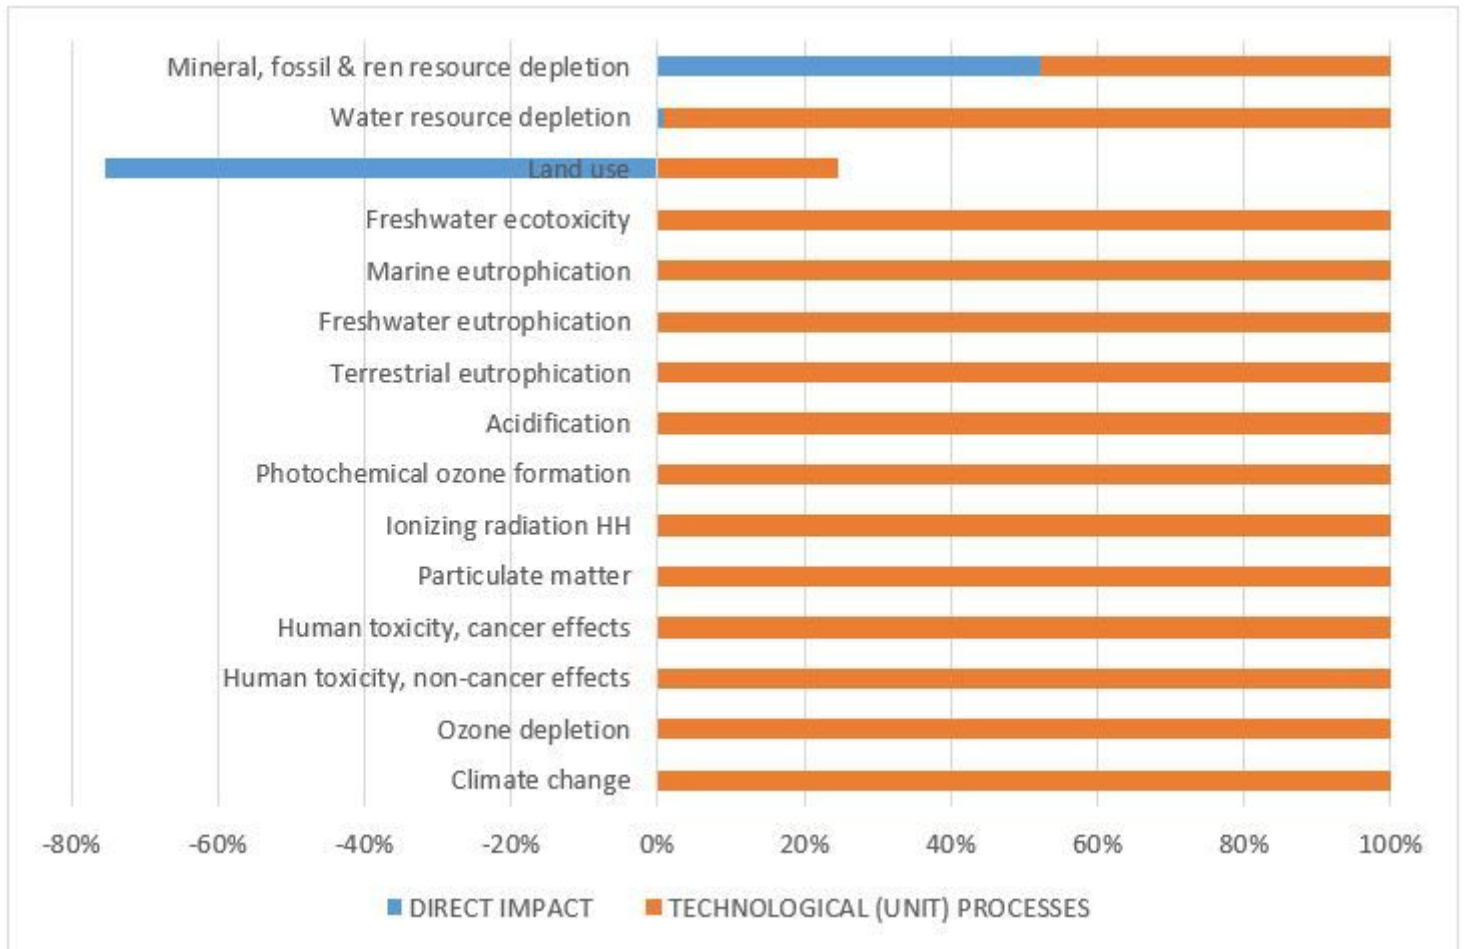


Figure 3

Shares of direct impact and other technological processes - after the characterisation stage [%]

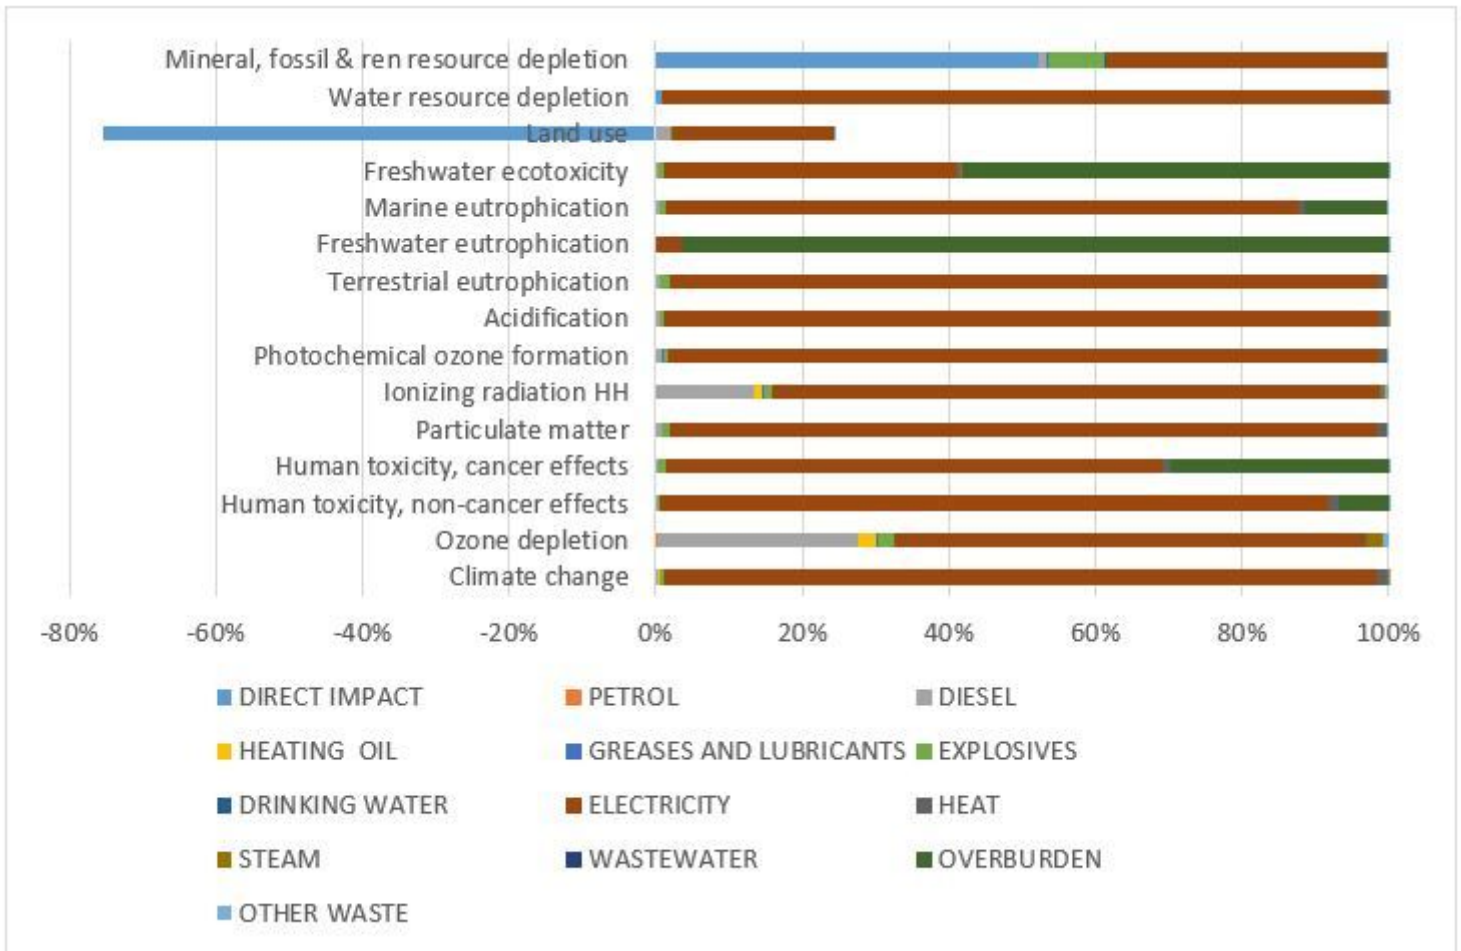


Figure 4

Shares of unit processes - after the characterisation stage [%]